

Kongeriget Danmark

Patent application No.: PA 2003 01002

Date of filing: 02 July 2003

Applicant:
(Name and address) DMA Sorption A/S
Skelstedet 5
DK-2950 Vedbæk
Denmark

Title: A filter

IPC: -

This is to certify that the attached documents are exact copies of the above mentioned patent application as originally filed.



Patent- og Varemærkestyrelsen
Økonomi- og Erhvervsministeriet

28 July 2004

Susanne Morsing
Susanne Morsing

PRIORITY DOCUMENT
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH
RULE 17.1(a) OR (b)

Title

02 JULI 2003

A filter

Modtaget

5 Field of invention

The present invention relates to a filter, a method of making a filter and a method of filtering a contaminated fluid. The invention particularly relates to a filter having a composition by which the filter is not clogged up due to deposit of contaminants within outer part of filtering media. All patent and non-patent references cited in the present application, are hereby incorporated by reference in their entirety.

Background of invention

15 Filters for removing contaminating components from liquid are known from the prior art. Filters are usually constructed to draw the fluid across one or more layers of a porous medium, hereby separating dispersed particles or compounds from a dispersing fluid.

20 Traditional filters suffer from the dilemma that on one hand they need to have an open structure in order to retain a certain hydraulic conductivity, but on the other hand the structure must not be too open in order to retain dispersed particles and compounds. Traditional filters also suffer from gradually falling hydraulic conductivity (pressure drop) as more and more particles are trapped within the filtration medium.

25 Clogging rather than use-up of filter capacity often determines the frequency of filter regeneration or replacement.

The filter capacity of a filter has been increased by using alternating layers of filtering media and spacer media, hereby letting the contaminated liquid passing parts of the outer filtering media by running in the spacer media. When the contaminated liquid passes through the filter in the spacer media, some contaminants are adsorbed by the filtering material. The drawbacks of these filters are that although the filter capacity is increased, there is still a pressure drop as materials with low hydraulic capacity (and high absorptive capacity) are adsorbed to the outer layers of filtering media, hereby the liquid has a longer way in the spacer

medium before it can enter through filtering media. With time the outer filter media is filled with contaminants, the flow capacity of the liquid through the filter is decreases as well as a pressure drop arises.

5 US 4,299,702 describes a liquid separation apparatus of spiral type including a membrane module comprising a hollow mandrel having at least a hole, at least one pair of semipermeable membrane sheets and at least one pair of first and second spacing layers, where the membrane sheets and spacing layers being wound about the mandrel. The first spacing layer forms, with said membrane sheets, a first pas-
10 sage for a permeated solution to be discharged therefrom into the interior of said mandrel through the hole. The second spacing layer forms, with said membrane sheets, a second passage for a feed solution or a non-permeated solution. The membrane module has a first opening on the circumference and an axial opening in the vicinity of the mandrel.

15 US 4,271,025 describes a filter cartridge for a liquid-straining filter assembly designed for a radial flow-through. The cartridge has a coiled filter body which surrounds a perforated central sleeve and is axially confined between end discs. The coiled filter body consists of overlying layers of two axially offset strips of creped
20 filter paper. The protruding spiral edges of the two coiled strips being glued to the end discs, while the recessed opposite edges form bypass flow gaps interconnecting the axial channel portions between the creped paper layers to form a zigzag-shaped transverse flow channel for depth-filtering action, when the entry layers of the cartridge become clogged.

25 US 6,153,098 describes fluid filter element which has a hollow perforate cylindrical supporting core. A relatively fine filter media of substantial cross section is spirally wound about the supporting core with adjacent layers spaced from each other and with the fine filter media accommodating fluid flow for filtering in both a radial and
30 circumferential direction through the cross section and with free access through the cross section to the supporting core. In substantially the same manner, a relatively coarse filter media of substantial cross section is disposed in the space between the layers of fine filter media and with the coarse filter media exiting at the supporting core, the coarse filter media accommodating fluid flow for filtering in both a radial
35 and circumferential direction through the cross section and with free access through

the cross section to the supporting core. A central barrier is disposed adjacent the supporting core and at least one of the layers of filter media in approximately the center of the filter element to assist in the filtration process.

- 5 US 2001/0037982 A1 and US 6,391,200 both claiming priority of U.S. provisional patent application Ser. No. 60/103,233 filed Oct. 5, 1998 describe a filter including alternating layers of filter medium and diffusion medium wherein at least a portion of the layers of filter medium (non-qualifying layers) have bypass apertures. The sheets of the filter medium and the diffusion medium are wrapped, or coiled, around
10 an elongated, porous, rigid core having a multiplicity of openings. Annular end caps are bonded to the ends of the filter to prevent contaminated fluid from by-passing the filter. The bypass apertures in the filter medium allow a portion of the fluid to pass therethrough instead of passing through the filter medium of that particular layer. After passing through one of the non-qualifying layers of filter medium, the
15 fluid passing through the bypass apertures and the fluid passing through the filter medium are re-mixed and diffused in the diffusion medium before being filtered by the next layer of filter medium. Preferably, the bypass apertures provide uniform contamination loading of the non-qualifying layers of filter medium.
- 20 The majority of the prior art filters are small filters, which have to be replaced often due to clogging up by contaminants. For many filtration purposes these small filters are not suitable as large amounts of contaminated liquid are to be filtered.

Definitions

- 25 Bypass space. By a bypass space is to be understood an open space at the edges of layers of filtration medium and/or spacer medium through which open space contaminated liquid can circumvent part of the layers of filtration medium and/or spacer medium.
- 30 Central core. By a central core is to be understood a pipe or tube of a material with a high strength hereby maintaining the pipe-shape when in use. The material can be polymer or metal or the like. The central core is perforated with holes where liquid solution can pass through.
- 35

Contaminants. By contaminants is to be understood any particles, compounds or substances which is intended to be partly or fully separated from a liquid.

5 **Contaminated liquid.** By contaminated liquid is to be understood any liquid containing particles, compounds or any substances which is intended to be partly or fully separated from said liquid.

10 **Deposition of contaminants.** By deposition of contaminants is to be understood any way any contaminants can be caught and/or absorbed within the filtration medium or spacer medium or on the surface of the filtration medium or spacer medium.

15 **End cap.** By an end cap is to be understood a closure, which partly or fully closes layers of edges and/or ends of filtration medium and spacer medium. A cylindrical filter has one or two end caps, and a squared filter has from one to four end caps.

20 **Filtration area.** By a filtration area is to be understood the large surface of a filtration medium.

25 **Filtration medium.** By a filtration medium is to be understood a medium wherein a liquid or fluid containing particles and/or compounds can be filtered by absorbing at least part of the particles and/or compounds of the fluid and letting the fluid pass through the filtration medium. The filtration medium can be of different material.

30 **Horizontal flow.** By horizontal flow is to be understood a flow in the direction parallel to the pipe of the central core.

35 **Inner layer.** By an inner layer of filtration medium and an inner layer of spacer medium is to be understood layers of the mentioned media situated in the filter closest to where contaminated liquid exits the filter.

40 **Layer.** By a layer is to be understood a single sheet when the filter is composed of filtration medium and spacer medium which is stacked; when the filter is rolled a layer is one round of filtration medium and/or spacer medium.

Outer layer. By an outer layer of filtration medium and an outer layer of spacer medium is to be understood layers of the mentioned media situated in the filter closest to where contaminated liquid enters the filter.

5 Pores. By pores of filtration medium and spacer medium is to be understood any open structure of said media and where liquid can pass through. Depending on the pore size, part or none of particles and compounds in the liquid can pass through said media. The pores of the filtration medium and spacer medium need not be systematic ordered within said media. Natural and processed open structures of e.g.
10 wool, cotton, and rock wool, hydrophobic cellulose etc. are also to be understood as pores.

Radial flow. By radial flow is to be understood a flow in the direction radially to the direction of the pipe of the central core.

15 Sealing. By a sealing is to be understood sealing or closing of one or more of layers of edges and/or ends of filtration medium and spacer medium. A sealing does not necessary need to seal the entire edge of one layer of filtration medium together with the entire edge of one layer of spacer medium next to said filtration medium.
20 The sealing can partly seal the edge of one or more filtration medium and/or spacer medium and partly seal the edge of spacer medium and/or spacer medium next to it. A sealing can be glue, or a sealing can be material attached by glue, or a sealing can be attached to the edge of filtration medium and/or spacer medium due to the pressure of the end cap e.g. a packing ring fastened by the end cap.

25 Spacer medium. By a spacer medium is to be understood a medium wherein a liquid or fluid containing particles and/or compounds can run. The spacer medium comprises more or less open areas between filtration media, and enhances the distribution of the contaminated liquid within the filter. The spacer medium can also
30 be a filtration medium in the way that the spacer medium can function as a filter. The pores of the spacer medium is larger then the pores of the filtration medium.

Summary of invention

35 The present disclosure relates to a filter, a method of making a filter and a method of filtering a contaminated fluid.

Disclosed is a filter for liquid filtration, said filter comprises

- 5 ◦ at least two layers of filtration medium, comprising
 - at least one inner layer of filtration medium and
 - at least one outer layer of filtration medium,
 - wherein each layer has at least one edge and a filtering area, and
- 10 ◦ wherein a first sealing seals said at least one edge of said at least one inner layer of filtration medium, and said first sealing directs liquid to be filtered through the filtering area of said at least one inner layer of filtration medium having the sealing, and wherein
- 15 ◦ the liquid to be filtered enters the filtration material
 - through the filtering area of said at least one outer layer of filtration medium and/or
 - through said edge of said at least one outer layer of filtration medium and/or
 - between two adjacent edges of layers of filtration medium.

20 Filters according to the present invention have been found to provide improved fluid distribution over the filtration medium resulting in an optimal use of the filtration medium, reduced pressure drop and increased filter life, without a reducing in filter rating.

25 Due to the filter composition of the present invention large filters can be produced wherein the filtration capability is high as the filtration medium is used up rather than clogged

30 Description of Drawings

Figure 1. Cross section of a circular filter with filtration medium and spacer medium and with indications of sealings. 1 Spacer medium. 2 Filtration medium. 3 Sealing. 4 Core.

Figure 2. Longitudinal section of a cylindrical filter with concentric rings of filtration medium and spacer medium surrounding a core. Sealings and perforations are shown at the endcaps. 1 Spacer medium. 2 Filtration medium. 3 Sealing. 4 Core. 5 Endcap. 6 Perforations in end cap. 7 Apertures of core.

5

Figure 3. Section of a cylindrical filter showing the end cap with perforations, bypass space between the edges of filtration/spacer medium and the end cap, and indication possible flow directions of the liquid to be filtered. 1 Spacer medium. 2 Filtration medium. 3 Sealing. 4 Core. 5 Endcap. 6 Perforations in end cap. 7 Apertures of core. 8 Arrows indication possible flow of liquid to be filtered.

10

Figure 4. An unrolled filtration material from a cylindrical filter showing the deposit of the contaminants when the filter has been used for a relatively short time. 2 Filtration medium, unrolled. 10 Deposits of contaminants.

15

Figure 5. An unrolled filtration material from a cylindrical filter showing the deposit of the contaminants when the filter has been used for a longer time than the filtration material of Fig. 4. 2 Filtration medium, unrolled. 10 Deposits of contaminants.

20

Figure 6. An unrolled filtration material from a cylindrical filter showing the deposit of the contaminants when the filter has been used for a longer time than the filtration material of Fig. 5. 2 Filtration medium, unrolled. 10 Deposits of contaminants.

25

Figure 7. A filter house with four filter cartridges. 4 Core. 5 Endcap. 11 Filter cartridge. 12 Inlet of contaminated liquid. 13 Sump for contaminated liquid to be filtered. 14 Outlet for filtered liquid.

30

Figure 8. Example of production of a rolled filter. Spacer medium is placed above filtration medium before rolled around a core. In the figure spacer medium and filtration medium is each shown with two different pore sizes. 1 Spacer medium. 2 Filtration medium. 4 Core.

35

Figure 9. Example of production of a rolled filter. Spacer medium is placed above filtration medium before rolled around a core. In the figure spacer medium is shown with three different pore sizes. 1 Spacer medium. 2 Filtration medium. 4 Core.

Figure 10. Example of a method for making a filtration medium hydrophob. 15 roll of filtration medium with non-treated cellulose fibre. 16 Bath with resin. 17 Valves for managing the sheet. 18 Valves releasing the filtration of the solution. 19 Bath with a solution of sulphate. 20 Oven. 21 Roll of filtration medium with hydrophob filtration medium.

Detailed description of the invention

10 The present invention relates to a filter for liquid filtration, said filter comprises at least two layers of filtration medium, comprising at least one inner layer of filtration medium and at least one outer layer of filtration medium, wherein each layer has at least one edge and a filtering area, and wherein a first sealing seals said at least one edge of said at least one inner layer of filtration medium, and said first sealing
15 directs liquid to be filtered through the filtering area of said at least one inner layer of filtration medium having the sealing, and wherein the liquid to be filtered enters the filtration material through the filtering area of said at least one outer layer of filtration medium and/or through said edge of said at least one outer layer of filtration medium and/or between two adjacent edges of layers of filtration medium.

20 Another embodiment comprises a filter for liquid filtration, said filter comprises at least two layers of filtration medium, comprising at least one inner layer of filtration medium and at least one outer layer of filtration medium, wherein each layer has at least one edge and a filtering area, and wherein a first sealing seals said at least one edge of said at least one inner layer of filtration medium, and said first sealing
25 directs liquid to be filtered through the filtering area of said at least one inner layer of filtration medium having the sealing, and wherein the liquid to be filtered enters the filtration material through the filtering area of said at least one outer layer of filtration medium and/or through said edge of said at least one outer layer of filtration medium and/or between two adjacent edges of layers of filtration medium.

30 In an embodiment the filter further comprising at least one layer of spacer medium, wherein the at least one layer of spacer medium has at least one edge and a spacer area, and wherein the at least one layer of spacer medium is provided between the
35 at least on inner layer of filtration medium and the at least one outer layer of filtration

medium with the spacer area of the spacer medium next to the filtration area of the filtration medium.

5 In a preferred embodiment the filter is composed of a plurality of alternating layers of filtration medium and spacer medium, where contaminated liquid can bypass some of the layers of filtration medium and/or spacer medium and enter the filtration medium and/or spacer medium from the edges of the filtration medium and spacer medium.

10 The alternating composition of the filter relating to filtration medium and spacer medium increases the capacity of the filter measured by amount of filtered liquid per time unit as well as increasing the filter life. The spacer medium disperses the contaminated liquid throughout the layers of filtration medium. Hereby the filtration medium is not clogged by contaminants as in a filter without a spacer medium.
15 Allowing contaminated liquid to bypass layers of filtration medium and spacer medium further increases the capacity of the filter, filtration rate and the filter life. When the contaminated liquid bypass layers of filtration medium and spacer medium the contaminants are dispersed more evenly throughout the filtration layers of the filter.

20 Clogging up of filter cartridge limits the possibility to produce large filters. As layers of filtration medium trap the contaminants in the contaminated liquid, the filter eventually clogs up, the pressure of the filtered liquid drops and with time contaminated liquid cannot enter the filter. In a clogged up filter cartridge all filtration medium is seldom utilized for filtration that is contaminants are not deposited within
25 all filtration medium. In a filter composed only of filtration medium, the filter has to be replaced when 2-10% of the outer filtration medium has trapped up contaminants. The construction of a filter according to the present invention increases the filter capacity and filter life by distributing the contaminated liquid. The filter only needs to
30 be replaced when 50-90% of the filtration medium has trapped up contaminants, depending on the construction of the filter. This is a surprisingly high filtration capacity obtained by the present invention.

35 It is not necessary a goal to obtain an even distribution of contaminated liquid within the filter, rather filter with increased filter capacity and increased filter life is obtained.

The filters of to the present invention are inexpensive due to a simple construction.

Sealings and bypass spaces

5

Sealings are used to close and/or seal edges of one or more layers of filtration medium and spacer medium.

10

The part of the filter where filtrated liquid exits the filtration medium is denoted the inner part. In this inner part of the filter a first sealing seals at least the innermost layer of filtration medium, this first sealing prohibiting liquid to enter said at least one edge of said sealed at least one inner layer of filtration medium. The sealing can encapsulate the edge of the at least one inner layer of filtration medium. The first sealing can also be a glue joint prohibiting liquid to enter said at least one edge of

15

said glued at least one inner layer of filtration medium.

In an embodiment the filter further comprising a second sealing, said second sealing seals one or more of said edges of layers of filtration medium and/or spacer medium, wherein said first sealing and said second sealing have a mutual distance, and where the edges of filtration medium and/or spacer medium between said first

20

sealing and said second sealing are unsealed.

In yet another embodiment the filter further comprising a number of additional sealings with distance to said second sealing and each with mutual distance, and wherein said additional sealing each is sealing one or more of the edges of said

25

layers of filtration medium and/or of the edges of said spacer medium and where the edges of said filtration medium and said spacer medium between each sealing are unsealed.

In a further embodiment of the filter said second sealing and/or said additional sealings each comprises sealing said edges of filtration medium and/or spacer medium and wherein said sealing comprises encapsulation one or more of said edges of layers of filtration medium and/or spacer medium or gluing one or more of said edges of layers of filtration medium and/or spacer medium.

30

35

5 The sealing can be an end cap where said end cap provides open spaces comprising bypass spaces between said sealings, where contaminated liquid or filtered liquid can enter said bypass spaces and further enter into said filtration medium and said spacer medium through said edges of said filtration medium and said spacer medium or between two adjacent edges of layers of filtration medium and/or layers of spacer medium.

10 Sealings are also used to mount the end cap which is described below to the edges of layers of filtration medium and spacer medium, the filter comprises at least one end cap comprising first sealing, which comprises totally closing, sealing or encapsulation of the end of at least one of the inner layers of filtration medium.

15 It is of outermost importance that contaminated liquid cannot pass through the filter without passing through at least one layer of filtration medium. To ensure this filtration of contaminated liquid the innermost part of edges of at least one layer of filtration medium is sealed.

20 In an embodiment the first sealing comprises totally closing of the edges of at least one of the inner layers of filtration medium together with the edge of at least one of the inner layers of spacer medium, wherein said at least one of the inner layers of filtration medium and said at least one of the inner layers of spacer medium are situated next to each other.

25 The sealings described herein can have the only function to seal the edges of the at least one layer of filtration medium or to seal the edges of the at least one layer of filtration medium together with the intermediate spacer medium. The sealing can further have the function to attaching the end cap to the filtration medium and spacer medium.

30 When the sealings seal part of the area between an end cap and the edges of filtration medium and spacer medium open area are obtained between the end cap and the edges of filtration medium and spacer medium, these open areas are bypass spaces. The function of a sealing is to force the contaminated liquid to enter into the layers of filtration medium and/or spacer medium. After the contaminated
35 liquid are forced by a sealing to enter into filtration medium and/or spacer medium

the liquid can stay within the filtration medium and/or spacer medium within the rest of the filter cartridge or less contaminated liquid can exit the filtration medium and/or spacer medium on the other side of the sealing hereby entering another bypass space, and the liquid can again enter into the filtration medium and/or spacer medium at the next sealing. Eventually the liquid without contaminants pass through the innermost layer(s) of filtration medium and exits the filter through a core as described herein below.

The number of innermost layers of filtration medium and spacer medium sealed in the edges may change due to filter size or which kind of contaminated liquid is to be filtered. In an embodiment at least one of the inner layers of filtration medium and/or at least one of the inner layers of spacer medium that are sealed at the edges are at least 2 layers of filtration and/or spacer medium, such as at least 3 layers, such as at least 4 layers, such as at least 5 layers, such as at least 6 layers, such as at least 7 layers, such as at least 8 layers, such as at least 9 layers, such as at least 10 layers. Preferred is sealing of at about 1-7 layers. More preferred is sealing of about 5 layers.

In an embodiment the filter comprises at least one end cap comprising second sealing, said second sealing comprises totally closing of the space between the edge of a number of layers of filtration medium and/or spacer medium and said end cap, wherein first sealing and second sealing leaves a bypass space for contaminated liquid between said end cap and the edges of the layers of filtration medium and spacer medium positioned between first sealing and second sealing.

In another embodiment the filter comprises a number of additional sealings that are situated outside of second sealing, and wherein said additional sealings each are sealing said end cap to the edge of said layers of filtration medium and of said spacer medium and leaving bypass space between the end cap and the edges of the layers of filtration medium and spacer medium.

In yet another embodiment said number of additional sealings are at least 1, such as at least 2, for instance at least 3, such as at least 4, for instance at least 5, and each additional sealing increases the number of bypass spaces. Preferred is 1 or 2 additional sealings in excess of first sealing.

5 The sealings need not be distributed evenly across the filter, the space between two sealings may be from about 0.4 to 20 cM, such as from about 0.5 to 15 cM, e.g. about 1 to 10 cM, such as from about 1.5 to 8 cM, e.g. about 2 to 7 cM, such as from about 3 to 6 cM, e.g. about 4 to 5 cM. Preferred is when the sealings are distributed with about 5 cM.

10 The second sealing and/or said additional sealings each comprises sealing of part of edges of filtration medium and part of edges of spacer medium. In this way it is not important that the entire edge of a single or more edges of filtration medium and spacer medium are sealed. The sealing may fluctuate between the edges of the layers of filtration medium and spacer medium.

15 Each sealing may have a width of about 0.1 to 15 cM, such as about 0.15 to 1 cM, e.g. about 1 to 3 cM, such as about 3 to 5 cM, e.g. about 5 to 7 cM, such as about 7 to 9 cM, e.g. about 9 to 11 cM, such as about 11 to 13 cM, e.g. about 13 to 15 cM. Preferred is a width of about 0.1 to 3 cM. More preferred is a width of about 0.2 to 2 cM. Most preferred is a width of about 0.1 to 0.5 cM.

20 The sealings can have any length from the inside of the end cap to the end pointing towards and/or in between the edges of the layers of filtration medium and spacer medium.

25 In one embodiment the length of the sealing is between 0.1 and 15 cM, such as about 0.1 to 1 cM, e.g. about 1 to 2 cM, such about 2 to 3 cM, e.g. about 3 to 4 cM, such about 4 to 5 cM, e.g. about 5 to 6 cM, such about 6 to 7 cM, e.g. about 7 to 8 cM, such about 8 to 9 cM, e.g. about 9 to 10 cM, such about 10 to 11 cM, e.g. about 11 to 12 cM, such about 12 to 13 cM, e.g. about 13 to 14 cM, such about 14 to 15 cM. Preferred is a length of the sealings of about 0.1 to 5 cM. More preferred is a length of the sealings of about 0.2 to 3 cM. Most preferred is a length of the sealings of about 0.3 to 2 cM.

35 The sealings can have any suitable form, such as e.g. squared, triangular, round or conical. Preferred are triangular or conical sealings. More preferred are conical sealings. The height and width of said conical sealings can be as described elsewhere herein, where the width is the width at the base of the conical sealing,

and the width at the top of the conical sealing is lesser than the width at the base. In one embodiment the width at the top of the conical sealing is smaller than the width at the base, such as 5-10% smaller, e.g. 10-15% smaller, such as 15-20% smaller, e.g. 20-25% smaller, such as 25-30% smaller, e.g. 30-35% smaller, such as 35-40% smaller, e.g. 40-45% smaller, such as 45-50% smaller, e.g. 50-55% smaller, such as 55-60% smaller, e.g. 60-65% smaller, such as 65-70% smaller, e.g. 70-75% smaller, such as 75-80% smaller, e.g. 80-85% smaller, such as 85-90% smaller, e.g. 90-95% smaller. Preferred is 25-95% smaller. More preferred is 40-80% smaller. Most preferred is 50-70% smaller.

10

The sealings can be constructed of any suitable material. In an embodiment the sealing comprises hydraulic glue, polymer, rubber packing, and metallic packing. The sealings can also comprise polyethylene, polypropylene, polyolefins, polyamids. Preferred is when the sealings comprise polyethylene or polypropylene.

15

The sealings can be separate of the end caps, which is described below. The sealings can also be mounted on the end caps or sealings and end cap can be cast in one piece depending of the material of the end cap.

20

The function of the bypass spaces is to enhance the entry of contaminated liquid into the filter. Enhancing the entry means the flow rate is improved respectively to the deposition of contaminants within the filter and when comparing to filter without bypass spaces, as more contaminated liquid can enter the filter than in a filter without the bypass spaces. Enhancing the entry also means that as the filter has been used for a time and contaminants are deposited within the filter the contaminants are deposited within the filter, the contaminated liquid still has enhanced possibility to enter into the filtration medium and spacer medium.

25

The bypass spaces can have different dimensions depending on the filter construction, the configuration of the end cap with or without perforations as described elsewhere herein, and the type of contaminated liquid to be filtered.

30

The bypass spaces improves the filter life, the filtration rate and ensure no or only a little pressure drop as the filter is in function. The bypass spaces further optimise the possibility to construct large filters wherein the filtration medium is used up with no

35

or only a little pressure drop across the filter cartridge is obtained as the filter is about to be replaced with a new filter.

5 By a large filter is to be understood a filter where the thickness of the layers of filtration medium and spacer medium substantially comprising the radius of the filter is above 4 cM, such as above 6 cM, e.g. above 8 cM, such as above 10 cM, e.g. above 15 cM, such as above 20 cM, e.g. above 25 cM, such as above 30 cM, e.g. above 35 cM, such as above 40 cM, e.g. above 45 cM.

10 In another embodiment the radius of the filter comprises 1-5 cM, such as 5-10 cM, such as 10-15 cM, such as 15-20 cM, such as 20-25 cM, such as 25-30 cM, such as 30-35 cM, such as 35-40 cM, such as 40-45 cM, such as 45-50 cM, such as 50-60 cM, such as 60-70 cM, such as 70-80 cM, such as 80-90 cM, such as 90-100 cM. Preferred is a radius of between 5 and 80 cM. More preferred is a radius of between 15 and 60 cM. Preferred is a radius of between 30 and 40 cM.

End cap

20 Sealings without end cap can or at least one end cap is utilised at the edges of layers of filtration medium and spacer medium.

25 The end cap of the present invention has several functions. It supports the structure of the layers of filtration medium and spacer medium, hereby keeping the filter together. It provides bypass space where more or less contaminated liquid can circumvent part of the filter. It provides holding means when the filter is placed in or removed from a filter house as described herein below.

30 An end cap can be self-adhesive sealings only, where the sealings are used to seal the edges of layers of filtration medium and spacer medium as described above.

The end cap can also be a unit, which is placed on and sealed to the edges of filtration medium and spacer medium.

35 In an embodiment the end cap comprises perforations in the end cap itself in the area outside of the first sealing, and contaminated liquid can run through said

perforations. Hereby the amount of liquid that can be filtered per time unit is increased, as the barrier for the contaminated liquid to enter the filter is lowered.

5 The combination of perforations in the end cap and sealings between the end cap and the edges of filtration medium and spacer medium, has been found to have a synergistic effect of simultaneously increasing filtration capacity and minimizing pressure drop across the filter cartridge without reducing the filter rating.

10 The perforations of the end cap can be of any size from 0.0005 cm^2 to at least 100 cm^2 , depending on the stability of the material utilized to produce the end cap. The perforations can be of sizes between $0.0005 - 0.5 \text{ cm}^2$, $0.5 - 1 \text{ cm}^2$, $1 - 2 \text{ cm}^2$, $2 - 3 \text{ cm}^2$, $3 - 4 \text{ cm}^2$, $4 - 5 \text{ cm}^2$, $5 - 7 \text{ cm}^2$, $7 - 10 \text{ cm}^2$, $10 - 20 \text{ cm}^2$, $20 - 40 \text{ cm}^2$, $40 - 60 \text{ cm}^2$, $60 - 80 \text{ cm}^2$, $80 - 100 \text{ cm}^2$. Preferred are perforations of 0.005 cm^2 to 10 cm^2 . More preferred are perforations of 0.05 cm^2 to 5 cm^2 . Most preferred are
15 perforations of 0.1 cm^2 to 1 cm^2 .

The end cap can be produced of any water stabile material such as metal or polymers. Preferred materials are polymers, more preferred are polyethylene and polypropylene.
20

The thickness of end caps in the areas outside of the sealings can be between substantially 0.01 to 1.5 cm , such as between 0.1 to 1.2 cm , e.g. 0.2 to 1.0 cm , such as 0.3 to 0.8 cm , e.g. 0.4 to 0.6 cm . Preferred is thickness of 0.1 - 0.7 cm . More preferred is 0.2 - 0.5 cm . Most preferred is substantially 0.3 cm .
25

The shape of the end cap can be adapted to the form of the filter. When the filter is composed of stacked layers of filtration medium and spacer medium, the preferred shape of the end cap is quadrangular. To a filter of stacked layers, the number of end cap is from one to six, where one to all of these end caps can have perforations
30 as described herein above.

When the filter is cylindrical as described below, the preferred shape of the end cap is circular. The preferred number of end cap for a cylindrical filter is two, although one end cap can be enough. Depending of the field of application, the filter is
35 constructed with end caps with small or larger perforations, if any perforations at all.

In general, increasing the numbers and/or size of perforations increases the flow rate through the filter.

5 Independent of the overall shape of the end cap, the end cap can be substantially flat or more or less v-shaped in a side view. The v-shaped end cap lets a larger amount of contaminated liquid enter into the filter. Preferred is when the end cap is substantially flat.

10 The size of the end cap can be selected from smaller than the dimension of the filter to cover to larger than the dimension of the filter. Preferred is when the end cap has dimension that substantially fit to the dimension of the filter.

15 The end cap can have one or more apertures to fit to the cores as described herein below. Preferred is when the aperture is centrally placed in the end cap and fit to a central core of a cylindrical filter. No contaminated liquid can enter into the apertures, as these are to drain filtered liquid through cores mounted in the apertures of the end cap.

20 The end caps of a box-like filter can be clasped or fastened by a fastening mean around a stack of layers of filtration medium and spacer medium. Preferred is when the end caps are placed at the four edges perpendicular to the layers of filtration medium and spacer medium.

Filtration medium and spacer medium

25 The filtration medium can be any medium that can separate contaminants from a contaminated liquid. Spacer medium can be any medium that can perform any kind of space between two layers of filtration medium. The spacer medium may also have a separating effect upon the contaminated liquid and hereby separate part of
30 the contaminants from the contaminated liquid.

In an embodiment said filtration medium and said spacer medium have pores and the pores of the spacer medium are larger than the pores of the filtration medium.

The pores of the filtration medium is larger than 0.5 μM , such as larger than 2 μM , e.g. larger than 5 μM , such as larger than 10 μM , such as larger than 20 μM , such as larger than 30 μM , such as larger than 40 μM , such as larger than 50 μM , such as larger than 60 μM , such as larger than 70 μM , such as larger than 800 μM , such as larger than 90 μM , such as larger than 100 μM , such as larger than 110 μM , such as larger than 120 μM , such as larger than 130 μM , such as larger than 140 μM , such as larger than 150 μM , such as larger than 160 μM .

In another embodiment the pores of the filtration medium is comprises an average dimension of 0.5-5 μM , such as 5-10 μM , e.g. 10-20 μM , such as 20-30 μM , such as 30-40 μM , such as 40-50 μM , such as 50-60 μM , such as 60-70 μM , such as 70-80 μM , such as 80-90 μM , such as 90-100 μM , such as 100-110 μM , such as 110-120 μM , such as 120-130 μM , such as 130-140 μM , such as 140-150 μM . Preferred is 5-70 μM . More preferred is 10-40 μM . Most preferred is 20-60 μM .

The pores of the spacer medium can be larger than 0.05 μM , such as larger than 0.1 cM, e.g. larger than 0.2 cM such as larger than 0.4 cM, e.g. larger than 0.6 cM, such as larger than 0.8 cM, e.g. larger than 1.0 cM, such as larger than 1.5 cM, e.g. larger than 2.0 cM, such as larger than 2.5 cM, e.g. larger than 3.0 cM, such as larger than 3.5 cM, e.g. larger than 4.0 cM, such as larger than 4.5 cM, e.g. larger than 5.0 cM. Preferred are pores of 0.05-3 cM. More preferred are pores of 0.1-2.5 cM. Most preferred are pores of 0.2-2 cM.

The pores of the spacer medium are larger than the pores of the filtration medium. The ratio of the size of pores of the spacer medium to the size of pores of the filtration medium is between 1,1 and 25, such as between 25 and 50, e.g. between 50 and 75, such as between 75 and 100, e.g. between 100 and 125, such as between 125 and 150, e.g. between 150 and 175, such as between 175 and 200, e.g. between 200 and 225, such as between 225 and 250, e.g. between 250 and 275, such as between 275 and 300, e.g. between 300 and 325, such as between 325 and 350, e.g. between 350 and 375, such as between 375 and 400, e.g. between 400 and 450, e.g. between 450 and 500. Preferred is a ratio between 175 and 225. More preferred is a ratio between 200 and 225. Most preferred is a ratio of about 200.

In an embodiment said pores of said filtration medium and of said spacer medium constitute a porosity, and said porosity is substantially uniform throughout the filter. The porosity has a variation within a smaller area of the filtration medium and spacer medium, and by a porosity which is substantially uniform throughout the filter is meant that the variation within smaller areas are substantially uniform throughout the filter.

In another embodiment said pores of said filtration medium and said spacer medium constitute a porosity, and said porosity varies through the filter. In a stacked filter layers of filtration medium or spacer medium of different porosity is used. In a cylindrical filter the filtration medium and/or spacer medium where said porosity varies through the filter comprises different sections of filtration medium and/or spacer medium. The filtration medium and/or spacer medium can also be constructed with different porosity in different areas of the medium that is wrapped around a core.

In an embodiment said porosity of the filtration medium and/or spacer medium varies through the filter due to graded pore structure. Preferred is when said pores are smaller in the inner layers of said filtration medium and/or said spacer medium.

Materials of filtration medium and spacer medium

The filtration medium can be produced by a product selected from the group of: Polymers, paper, plant fibres, peat, plastics, wool, cotton, rock wool, cellulose, coal fibre and/or glass wool. Preferred is when the filtration medium is produced by a product selected from the group of polymers, plant fibres, wool, cotton, cellulose, and/or activated coal fibre. More preferred is when the filtration medium is produced of polymers selected from the group of polypropylene, polyethylene, polyester, and/or polycarbonat.

In the construction of filtration medium with plant fibre preferred is plant fibre selected from plants of the group of flax, elephant grass, hemp, hop, cotton, coconut palm, trees, straw, hay.

In an embodiment the filtration medium is produced by sheets of any or a combination of the above mentioned materials, preferred is when the sheets are produced mainly of cellulose fibres and/or polymer fibre. More preferred is when the filtration medium is produced of 90-95% of cellulose fibre.

5

The sheets are non-woven or woven sheets, preferred is non-woven sheets of cellulose fibres and/or non-woven sheets of polymer fibre as well as woven sheets of cellulose fibres and/or woven sheets of polymer fibre.

10

Cellulose fibre

The preferred material in the construction of the filtration material is cellulose fibre. These cellulose fibre can be natural or may be altered. Preferred is when said cellulose fibres are hydrophobic.

15

The cellulose fibres are made hydrophobic by treatment with compounds selected from the group of wax, starch, natural resins, synthetic resins, water insoluble polyvinyl alcohol, hydroxyethyl cellulose, ethyl cellulose, carboxymethyl cellulose, polyacrylate resin, alkyd resin, polyester resin. Preferred is when said cellulose fibres are made hydrophobic by treatment with natural resins.

20

Resins for treatment of the cellulose fibre can be but are not limited to Mobilcer®, T-lim®, Silicex Silikonate®, Rhodorsil®, Panodan AB®, Aquapel®, Kymene®, Escorez®, Wacker Silicone®.

25

The cellulose fibres are made hydrophobic by a solution of about 1-70% hydrophobic emulsion of the compounds mentioned above, such as about 5-50%, e.g. about 10-40 %, such as about 10-30 %, e.g. about 15-25 %, such as about 17-23 %, e.g. about 20%. Preferred is about 20 % of a natural resin.

30

The cellulose fibres are made hydrophobic by contacting the cellulose fibre with the mentioned hydrophobic emulsion for about 0.05-30 minutes, such as for about 0.1-20 minutes, e.g. about 0.2-15 minutes, such as about 0.3-10 minutes, such as about 0.4-7.5 minutes, e.g. about 0.5-5 minutes. Preferred is about 0.5-5 minutes

35

Preferred is when sheets of cellulose fibres are made hydrophobic by contacting with said hydrophobic emulsion for 0.3-10 minutes, more preferred is about 0.4-7.5 minutes, most preferred is about 0.5-5 minutes.

5 Following contact with the hydrophobic emulsion, the hydrophobic cellulose fibres or hydrophobic cellulose sheets contacted with the hydrophobic emulsion is released for water by dripping off or pressing water out of the cellulose. Preferred is when the water is pressed out of the cellulose fibre or cellulose sheets.

10 The hydrophobic cellulose fibres or sheets released for water is contacted with a solution of potassium sulphate or aluminium sulphate, or potassium-aluminium sulphate, in the concentration of about 0.01-30%, such as about 0.05-20%, e.g. about 0.1-10 %, such as about 0.2-5 %, e.g. about 0.5-4 %, such as about 1-3%, e.g. about 2 %. Preferred is about 0.5-4 %, more preferred is about 1-3%, most
15 preferred is about 2 %.

The hydrophobic fibres or sheets contacted with potassium sulphate, sodium sulphate or potassium-aluminium sulphate is released for water and dried. The resin is melted on the surface of the cellulose fibre in a process where the cellulose fibre
20 also is dried, this is either by ironing or oven treatment at a temperature of 60-150°C. Preferred is when the fibres or sheets are pressed dry and further dried in an oven at about 110°C for about 20 minutes.

One process where the cellulose fibre are made hydrophobic is illustrated in fig. 10
25 where a sheet of cellulose fibre from a roll of filtration medium (15), by use of valves (17) is directed to a bath with resin (16), released for fluid between two walves (18), further treated in a bath with a solution of potassium sulphate, sodium sulphate or potassium-aluminium sulphate (19), released for fluid (18), heat treated in an oven (20) and rolled on a roll comprising with hydrophobic
30 filtration medium (21).

Materials of spacer medium

35 In an embodiment the spacer medium is produced by a product selected from the group of polymers, paper, plant fibres, plastics, wool, cotton, rock wool, cellulose,

coal fibre, metal and/or glass wool. Preferred is when the spacer medium is produced by polymers. More preferred is when the spacer medium is produced by polymers selected from the group of polypropylene, polyethylene, polyester, polycarbonat.

5

The structure of the spacer medium can be any structure where the strands of the material are systematically oriented to random orientation. Preferred is when the spacer medium includes a first plane of spaced apart parallel strands forming longitudinal passages fixed by a second plane of spaced apart parallel strands forming in all a netting sheet. The angle between the first plane strands and the second plane strands can be any angel between 5 and 90 degree, such as between 30 and 90 degree, e.g. between 40 and 90 degree, such as between 40 and 50 degree or between 80 and 90 degree. Preferred are angles of about 45 degree and of about 90 degree. Most preferred are angles of about 90 degree.

15

The spacer medium can be oriented in any direction within the filter. The ends of the strands of the spacer medium at the end cap can form a angle with the end cap at anything between 5 and 175 degree, such as between 30 and 120 degree in a way that the strands of the spacer medium can be directed in any direction between away from and towards the core in the case of a circular filter as described elsewhere herein.

20

Core

In an embodiment the filter comprises at least one perforated core. The function of the core is to drain filtered liquid from the filter. Depending on the filter the filtered liquid is substantially free of contaminants or includes contaminants which can be removed by filtering through a filter with smaller pores.

25

The core can be produced of any material that can withstand the pressure which is obtained over the filtration medium and spacer medium, preferred is when the core is produced by polymer or metal.

30

To led filtered water from the filtration medium to the core, the core comprises apertures. The shape of the apertures can be any possible shapes such as round,

35

hexagonal, pentagonal, quadrangular, triangular, starshaped. Preferred is when these apertures are substantially round or substantially quadrangular.

5 The apertures of the core each have a dimension of about $0.25 \mu\text{m}^2$, such as about 0.5 mM^2 , e.g. about 1 mM^2 , such as about 2 mM^2 , e.g. about 3 mM^2 , such as about 4 mM^2 , e.g. about 5 mM^2 , such as about 6 mM^2 , e.g. about 7 mM^2 , such as about 8 mM^2 , e.g. about 9 mM^2 , such as about 10 mM^2 , e.g. about 11 mM^2 , such as about 12 mM^2 , e.g. about 13 mM^2 , such as about 14 mM^2 , e.g. about 15 mM^2 , such as about 16 mM^2 , e.g. about 17 mM^2 , such as about 18 mM^2 , e.g. about 19 mM^2 , such as about 20 mM^2 , e.g. about 25 mM^2 , such as about 30 mM^2 , e.g. about 35 mM^2 , such as about 40 mM^2 , such as about 45 mM^2 , e.g. about 50 mM^2 , such as about 55 mM^2 , e.g. about 60 mM^2 , such as about 70 mM^2 , such as about 80 mM^2 , e.g. about 90 mM^2 , such as about 100 mM^2 , e.g. about 120 mM^2 , such as about 140 mM^2 , e.g. about 160 mM^2 , such as about 180 mM^2 , e.g. about 200 mM^2 . Preferred is apertures of $0.5\text{-}100 \text{ mM}^2$. More preferred is apertures of $1\text{-}50 \text{ mM}^2$. Most preferred is apertures of $20\text{-}40 \text{ mM}^2$.

20 The apertures as described above can be evenly or un-evenly distributed throughout the surface of the core. Preferred is when the apertures are evenly distributed throughout the surface of the core. The apertures can occupy a small or larger area of the core, the apertures can comprises about 5-95 % of the surface area of said core, such as 5-10%, e.g. 10-15 %, such as 10-20%, e.g. 20-30 %, such as 30-40%, e.g. 40-50 %, such as 50-60%, e.g. 60-70 %, such as 70-80%, e.g. 80-95. Preferred is when the apertures comprises 20-30 % of the surface area of the core. Most preferred is when the apertures comprises 25% of the surface area of the core.

30 It is of outmost importance the core is stable to keep shape under function of the filter to ensure the structure of the filter and by this that no contaminated liquid can enter into the core. The material and number as well as size of the aperture are selected to ensure the stability of the core.

In an embodiment the core drains filtered liquid from the filter. The contaminated liquid enters the filter from the outside or through perforations of said end cap or into filtration medium or spacer medium from said bypass spaces. The filtration medium

and/or spacer medium withhold contaminants of the contaminated liquid, and eventually the filtered liquid enters into the core.

Cylindrical filter

5

In an embodiment the at least one filtration medium and the at least one spacer medium are overlying one another and spirally surrounding the central core. Hereby the filter becomes cylindrical. More than one core can be placed within the cylindrical filter. It is preferred that the filter comprises one perforated central core.

10

A cylindrical filter can be constructed when the at least one filtration medium and the at least one spacer medium is one layer of filtration medium and one layer of spacer medium. Hereby one layer of filtration medium and one layer of spacer medium is placed on each other and rolled around a core.

15

To ensure the contaminated liquid is filtered the at least one filtration medium form an inner zone adjacent to said core, comprising a zone without said spacer medium. The inner zone can comprises at least 1 round of said filtration medium, but also the inner zone may comprises at least 2 rounds of said filtration medium, such as at least 3 rounds, e.g. at least 4 rounds, such as at least 5 rounds, e.g. at least 6 rounds, such as at least 7 rounds, e.g. at least 8 rounds, such as at least 9 rounds, e.g. at least 10 rounds. Preferred is an inner zone of 1-5 rounds of filtration medium, more preferred is 1-4 rounds of filtration medium, most preferred is 1-3 rounds of filtration medium in the inner zone.

25

The inner zone of the filter can have different thickness due to the numbers of rounds of filtration medium in this zone, also the thickness of the filtration medium determines the thickness of the inner zone. The inner zone comprises about 0.05-15 cm, such as about 0.06-10 cm, e.g. about 0.07-5 cm, such as about 0.08-10 cm, e.g. about 0.09-5 cm, such as about 0.1-4 cm, e.g. about 0.1-3 cm, such as about 1-2 cm, e.g. about 2-3 cm, such as about 3-4 cm, e.g. about 4-5 cm, such as about 5-6 cm, e.g. about 6-8 cm, such as about 8-10 cm, e.g. about 10-12 cm, such as about 12-15 cm. Preferred is a thickness of the inner zone of 3-8 cm. More preferred is about 5-6 cm. Most preferred is about 5.4 cm.

35

The thickness of the inner zone can comprise from 0.1-100% of the total thickness of the filtration medium and spacer medium, such as 0.1-10%, e.g. 10-20%, such as 20-30%, e.g. 30-40%, such as 40-50%, e.g. 50-60%, such as 60-70%, e.g. 70-80%, such as 80-90%, e.g. 90-100%. Preferred is 20-40%. More preferred is 30-40%.
5 Most preferred is about 33%.

Further to ensure filtration of the contaminated liquid through at least the inner zone, the end cap is closed in the area of said inner zone, and perforated in the area outside of said inner zone. Hereby the contaminated liquid is forced to enter into the
10 spacer medium and/or filtration medium in the area outside of the inner zone.

In one embodiment the end cap is closed in the area of said inner zone and is further closed in part of the area comprising filtration medium and spacer medium, and no bypass spaces is located beneath said areas where the end cap is closed.
15 Hereby the contaminated liquid is forced to enter into the spacer medium and/or filtration medium in the area outside of the inner zone.

Compounds and/or particles to be removed from a contaminated liquid

20 The contaminated liquid can be any liquid with compounds and/or particles which is to be removed from the liquid in part or substantially total. Preferred is when the contaminated liquid is water contaminated with one or more compounds and/or particles. The compounds and/or particles can be any compounds and/or particles that can be removed from the liquid by passing the liquid through a filter. The
25 compounds and/or particles can be caught by the spacer medium and/or filtration medium due to absorption and/or adsorption and/or caught by the pores of the spacer medium and filtration medium.

The filter can as mentioned above remove any compounds and/or particles from a
30 liquid, preferred is filtering of compounds and/or or particles selected from the group of oil, sand, soil particles, bacteria, yeast, organic flocculation, dust, plant parts, plant nutrient. More preferred is compounds and/or particles selected from the group of organic liquids such as oil or hydrocarbons e.g. synthetic oils and fuels, coolants, paints, polymers, alcohols, solvents, aromatics, heavy metals, sewage, insecticides,
35 herbicides, ochre, humus. The heavy metals can be any selected among nickel,

lead, cadmium, mercury, chromium, molybdenum, manganese, iodine, copper, silver and gold.

The oils to be removed by filtration can be but are not limited to the common fuels:

- 5 No. 2 Diesel fuel®, No. 6 Diesel fuel®, Kerosene®, Bunker C®, DF-A Artic®, DF-2 General®, DF-1 Low temp®, F-76 Diesel®, NPD Mgo®, Diesel Fuel Marine (DFM)®, Naval distillate fuel NDF, MIL-F-16884H®, Gasoline®, Burner Fuel oil – ASTM D396 STD Spec fuel oil®, AVGas®, JP-4 Jet fuel®, F-44 (JP-5)®, JP-5 Jet Fuel®, JP-7 Jet Fuel®, JP-8 Aviation Turbine®, JP-5/ JP-8 Standard – MIL-T-5624P
10 Aviation Turbine Fuel®.

Other oils that can be removed by filtration can be but are not limited to the common lube and hydraulic oils: 9250 L06 lube oil diesel®, MIL-L-9000H Lube Oil, Shipboard high output diesel, 2190 TEP LTL Lube Oil®, MIL-L-17331H Lube Oil Steam
15 Turbine, ANSI/SAE J1899-95®, Motor Oil Automotive, HIL-H-5606® Hydraulic Fluid, MIL-L-23699 Aircraft Gas Turbine Synthetic Lubricant, MIL-H-17672D Hydraulic Fluid Petroleum, MIL-H-19457D Hydraulic Fluid Fire resistant, Transmission Fluid, Transformer Oil, Mineral Oil, Paraffin.

20 **Flow direction**

The flow direction of contaminated liquid is exemplified by the flow direction in a cylindrical filter. In this filter the contaminated liquid may enter the filter through the spacer medium or through the filtration medium either perpendicular to the direction
25 of the core or parallel to the direction of the core by entering the filtration medium or spacer medium from bypass spaces. The bypass spaces can be entered through the perforations of the end cap or parallel by the end cap, or bypass spaces inside a sealing is entered from the filtration medium or spacer medium.

- 30 The liquid which has entered the filtration medium and/or spacer medium and thus enter a bypass space and further again enters the filtration medium and/or spacer medium closer to the core is re-mixed with liquid passing through filtration medium and spacer medium.

5 Inside the filter the liquid can flow in any direction, except for outward, the flow in the filter eventually lead the liquid to the core. The liquid can flow in the coiled spacer medium to the inner zone of filtration medium, it can flow partly in the filtration medium and then pass through filtration medium and spacer medium more or less perpendicular to the core. The flow direction may be determined by the local pressure and deposited contaminants within the filtration medium and/or spacer medium. Deposited contaminants can be caught inside filtration medium or spacer medium or adsorbed to the surface on the filtration medium and/or spacer medium.

10 In the following text the area just inside a sealing is denoted 'beneath a sealing' no matter what way the filter has been oriented when in use, hereby 'beneath a sealing' may actually be 'above a sealing' when focus is on the lower side of a filter that is vertically orientated when in use. When a filter with bypass space and sealings
15 between the end cap and edges of filtration medium and spacer medium is in use to filtrate liquid contaminated with substances which is visible at least in more concentrated form than in the liquid, the first visible sign of deposition of contaminants is small V-shaped formations of contaminants deposited in and/or on the spacer medium and/or the filtration medium beneath the sealings. As the filter is
20 in use these V-shaped formation of contaminants enlarges and as they reach the opposite side of the filtration medium and spacer medium, the deposition area of contaminants becomes band-like areas. Further use of the filter will result in fusion of deposition areas and eventually the depositions of contaminants will be on the entire spacer medium and/or filtration medium.

25 Surprisingly the filter is not plugged with contaminants from the fluid in the filtration medium and/or spacer medium beneath the sealings of the end cap.

Filter cartridge

30 In another aspect a filter cartridge comprises a filter as describe herein above wherein said filter cartridge is used in a filter house. The filter cartridge is a unit that is easy to handle, and which is assembled to stay together when handled.

Filter house

35

5 In a further aspect a filter house comprises at least one filter cartridge as described herein above. The function of the filter house is to encapsulate the filter cartridge. In the area inside the filter house and surrounding the encapsulated filter cartridges contaminated liquid can be deposited, this comprises a sump. A pressure within the filter house ensure a flow of liquid from the sump through the filter to the core, through which core the filtered liquid is removed. When the filter house is in function it acts as a fluid-tight pressure vessel.

10 The filter house can encapsulate at least one filter cartridge, e.g. at least 2 filter cartridges, such as at least 3 filter cartridges, e.g. at least 4 filter cartridges, such as at least 5 filter cartridges, e.g. at least 6 filter cartridges, such as at least 7 filter cartridges, e.g. at least 8 filter cartridges. Hereby the number of filter cartridges within a filter house can be e.g. 1, 2, 3, 4, 5, 6, 7, and 8. Preferred is 1, 2, 3, 4, 5, 6 filter cartridges within a filter house, more preferred is 1, 2, 3, 4 filter cartridges within a filter house, most preferred is 1 or 4 filter cartridges within a filter house.

20 In the filter house wherein 2 and more filter cartridges are used, the filter cartridges are stacked and the core from each filter cartridges are connected to perform a draining tube to drain off said filtered liquid.

25 The filter house comprises a container, which has at least one opening means through which the filter cartridges can be changed. The opening means can be in the side, top or bottom of the filter house. Preferred is openings means in the top of the filter house. Further the filter house comprises at least one entry for contaminated liquid and at least one exit for the draining tube which is connected to the cores of the filters.

30 The filter house with filter cartridges is partly or fully filled with contaminated liquid, and the inside of the filter house is exposed to pressure of about 0.1-6 Bar, such as about 0.5-5 Bar, e.g. about 1-4 Bar, such as about 2-3,5 Bar, e.g. about 1 Bar, such as about 1.5 Bar, e.g. about 2 Bar, such as about 2.5 Bar, e.g. about 3 Bar, such as about 3.5 Bar, e.g. about 4 Bar, such as about 4.5 Bar, e.g. about 5 Bar, such as about 5.5 Bar, e.g. about 6 Bar. Preferred is 1-4 Bar, more preferred is a pressure about 3 Bar.

35

5 The filter cartridges inside the filter house are connected by one or more draining tube which are sealed, thus no contaminated liquid can pass into the draining tube. The draining tube further comprises the perforated core inside the filter cartridges and said perforated cores are connected by packings. To ensure no contaminated liquid enters the core or draining tube the core of the filter cartridges situated at the top of each stack of filter cartridges are closed at the end of the core not connected to another filter cartridge, or the upper filter cartridge is connected to a second draining tube.

10 The filter house can have any shape e.g. a box or barrel. Preferred is when the filter house is barrel shaped.

15 The filter house can have any dimension. When the filter house is barrel shaped it can have a diameter between 50 and 1000 mM, such as between 100 and 900 mM, e.g. between 200 and 800 mM, such as between 300 and 700 mM, e.g. between 400 and 600 mM such as between 450 and 550 mM, e.g. between 475 and 525 mM, such as about 500 mM.

20 Further the diameter of the barrel shaped filter house can be about 50-100 mM, about 100-150 mM, about 150-200 mM, about 200-250 mM, about 250-300 mM, about 300-350 mM, about 350-400 mM, about 400-450 mM, about 450-500 mM, about 500-550 mM. Preferred is a diameter about 400-450 mM, about 450-500 mM, and about 500-550 mM, more preferred is a diameter about 450-500 mM and about 500-550 mM. Most preferred is a diameter about 450-500 mM.

25 The filter house as described herein has a height of at least about 100 mM, such as at least about 200 mM, e.g. at least about 300 mM, such as at least about 400 mM, e.g. at least about 500 mM, such as at least about 600 mM, e.g. at least about 700 mM, such as at least about 800 mM, e.g. at least about 900 mM, such as at least about 1000 mM, e.g. at least about 1200 mM, such as at least about 1300 mM, e.g. at least about 1400 mM, such as at least about 1500 mM, e.g. at least about 1600 mM, such as at least about 1700 mM, e.g. at least about 1800 mM, such as at least about 1900 mM, e.g. at least about 2000 mM, such as at least about 2100 mM, e.g. at least about 2200 mM.

35

Further the height of the filter house can be about 100 mM, about 200 mM, about 300 mM, about 400 mM, about 500 mM, about 600 mM, about 700 mM, about 800 mM, about 900 mM, about 1000 mM, about 1100 mM, about 1200 mM, about 1300 mM, about 1400 mM, about 1500 mM, about 1600 mM. Preferred is a height of about 300 mM, about 500 mM, and about 1100 mM. More preferred is a height of about 500 mM, and about 1100 mM. Most preferred is a height of about 1100 mM

As describes herein above the contaminated liquid when entering the filter house is situated within a sump. The contaminated liquid can enter the sump from above, from the side or from the bottom. The contaminated liquid of the sump is kept in motion to avoid contaminants to sediment. When the contaminated liquid enters the sump from the bottom, the supply of this liquid makes the motion. The motion of the contaminated liquid can also be performed by stirring, boiling and/or gas permeation. Preferred is gas permeation to keep the contaminated liquid of the sump to be in motion. More preferred is when the supply of the liquid makes the motion.

To regulate the pressure of the filter house, the filter house comprises pressure regulation means to adjust the pressure to a predetermined level as described elsewhere herein.

When in function, contaminated fluid is pumped into the filter house through the entry, and inwardly through the filter cartridge to produce filtered fluid, which then exits first the filter cartridge through the core and draining tube and then the filter house through the outlet.

The filtration rate of contaminated liquid is dependent of the compounds and particles to be removed. For heavy metals a low filtration rate is used corresponding to a long retention time.

Due to a high filter capacity of the filter cartridge described herein above the filtration rates of contaminated liquid to be filtered is about 0.05-6.5 M³ per hour, such as about 0.05-0.5 M³ per hour, e.g. about 0.5-1.0 M³ per hour, such as about 1.0-1.5 M³ per hour, e.g. about 1.5-2.0 M³ per hour, such as about 2.0-2.5 M³ per hour, such as about 2.5-3.0 M³ per hour, e.g. about 3.0-3.5 M³ per hour, such as about 3.5-4.0

M³ per hour, e.g. about 4.0-4.5 M³ per hour, such as about 4.5-5.0 M³ per hour, e.g. about 5.0-5.5 M³ per hour, such as about 5.5-6.0 M³ per hour, e.g. about 6.0-6.5 M³ per hour. Preferred is about 0.5-2.5 M³ per hour. More preferred is about 0.5-2.0 M³ per hour. Most preferred is about 1.0-1.5 M³ per hour

5

Filtration systems with more filter houses

10 In another aspect a filtration system comprises at least two filter houses according to the above descriptions, wherein the at least two filter houses are connected in the way that contaminated liquid is filtered successively in the at least two filter houses, and where the contaminated liquid enters in a filter house no. 1 and the draining tube of filter house no. 1 is connected to the entry of filter house no. 2 and so forth.

15 In the filtration system the at least two filter houses graduates the filtration due to larger pores of filtration medium and spacer medium within filter house no. 1 than within succeeding filter houses and where the pores of the filtration medium and spacer medium are graded in the succeeding filter houses.

20 To optimise the filtration system contaminated liquid can be conveyed from the outside to any of the filter houses.

Production

25 An aspect comprises a method for the production of a filter, filter cartridge and/or filtration system according to the descriptions herein above.

30 A cylindrical filter can be produced by rolling one oblong layer of filtration medium and one oblong layer of spacer medium simultaneously around a central core. The width of the filtration medium and spacer medium correspond to the height of the filter. To ensure filtration of the contaminated liquid the inner part as described herein elsewhere is filtration medium. The outermost part of the filter can be filtration medium or spacer medium. The length and subsequent the thickness of the oblong layers of spacer medium and filtration medium determines the thickness of the filter.

The spacer medium may be wider than the filtration medium when the layers are placed upon each other before wrapped around the core, in this way the layers of spacer medium becomes higher than the layers of filtration medium when the filter is constructed as a cylindrical filter. The sealing between the end cap and layers of filtration medium and spacer medium must at least partly reach the edge of the filtration medium. Within the inner zone only filtration medium is used. This inner zone can be as wide as the spacer medium, or as wide as the filtration medium outside the inner zone of the filter. The end cap above the inner zone is sealed to ensure no contaminated liquid can bypass the filtration medium of the inner zone.

The filtration medium and spacer medium can have uniform porosity throughout the filter or one or both of filtration medium and spacer medium can have a graded porosity with smaller pores in the inner part of the filter.

The filter can also be constructed from oblong layers of filtration medium and spacer medium where one or both kind of medium is not long enough to constitute the entire layer of the medium. A new layer of filtration medium and/or spacer medium can be initiated with or without an overlapping layer of the ending layer of filtration medium and/or spacer medium. To continue a layer of ended spacer medium it is preferred that two ends of layers of spacer medium are overlapping.

Further the filter can be constructed from one or more oblong layers of spacer medium with short layers of filtration medium wrapped together with the spacer medium. Distance can be employed between the layers of filtration medium. The inner zone of the filter must be filtration medium.

A filter can also be constructed with more than one layer of filtration medium and/or spacer medium, which are wrapped around a core in case the filter is cylindrical, and which is stacked in case the filter is box-shaped, examples of this layered structures are:

- Filtration medium 1 and spacer medium 1.
- Filtration medium 1, spacer medium 1, filtration medium 2, and spacer medium 2.
- Filtration medium 1, spacer medium 1, filtration medium 2, spacer medium 2, filtration medium 3, spacer medium 3.

- Filtration medium 1, spacer medium 1, and spacer medium 2.
- Filtration medium 1, spacer medium 1, and filtration medium 2.
- Filtration medium 1, spacer medium 1, spacer medium 2, and filtration medium 2.
- 5 ◦ Filtration medium 1, spacer medium 1, spacer medium, 2 filtration medium 2 and spacer medium 3.

10 Wherein the innermost layer of the cylindrical filter is filtration medium. Different numbers of filtration medium and/or spacer medium may indicate different porosity of the layers and/or different materials of the layers.

Use

15 Another aspect comprises the use of a filter, filter cartridge and/or filtration system according to the descriptions herein above.

20 An aspect comprises the use of a filter, filter cartridge and/or filtration system according to the descriptions herein above for filtering contaminated liquid according to the description above.

25 An embodiment comprises the use of a filter, filter cartridge and/or filtration system according to the descriptions herein above for filtering contaminated liquid within areas selected from the group of factories, sewage works, paint factories, paper factories, ships. Preferred is filtering water contaminated with oil at ships. Preferred is ships selected from the group of oil tanker, transport ship, ferry, fishing vessel, container carrier, car carrier, feeder ship, Ro/Ro container, tanker, bulk carrier, tug Ro/Ro car transporter, V.L.C.C., FPSO, OBO carrier, passenger car ferry, ferry, dredger, cable layer, LPG layer, support vessel, fish carrier, cruise liner, frigate, aircraft carrier, helicopter carrier, sentinel II, offshore support, ice breaker, vehicle
30 cargo ship, fleet oiler, oil rig supply tug, drill platform, LPG carrier, dredger, floating storage barge.

35 The use of the filter, filter cartridge and/or filtration system according to the descriptions herein above for filtering contaminated liquid can be used at any ship independent of the size. The filter, filter cartridge and/or filtration system ships can

be registered to above at least 50 gross register tonnage, such as at least 400 register tonnage, e.g. at least 700 register tonnage, such as at least 1,000 register tonnage, e.g. at least 1,500 register tonnage, such as at least 2,000 register tonnage, e.g. at least 5,000 register tonnage, such as at least 10,000 register tonnage, e.g. at least 20,000 register tonnage, such as at least 40,000 register tonnage, e.g. at least 60,000 register tonnage, such as at least 80,000 register tonnage, e.g. at least 100,000 register tonnage. Preferred is use of the filter, filter cartridge and/or filtration system to ships of at least 400 register tonnage, more preferred is at least 700 register tonnage, most preferred is at least 1,500 register tonnage.

When using the filter, filter cartridge and/or filtration system according to the descriptions herein above for filtering contaminated liquid, the filtered water can be discharged to areas selected from the group of: land, river, sea, ocean, harbour. Preferred is discharging filtered water to the sea or ocean.

Preferred is to use filter, filter cartridge and/or filtration system according to the descriptions herein above for filtering water contaminated with oil at ships, where the amount of oil in the filtered water is less than about 25 ppm, such as less than about 20 ppm, e.g. less than about 15 ppm, such as less than about 14 ppm, e.g. less than about 13 ppm, such as less than about 12 ppm, e.g. less than about 11 ppm, such as less than about 10 ppm, e.g. less than about 9 ppm, such as less than about 8 ppm, e.g. less than about 7 ppm, such as less than about 6 ppm, e.g. less than about 5 ppm, such as less than about 4 ppm, e.g. less than about 3 ppm, such as less than about 2 ppm, e.g. less than about 1 ppm. Preferred is less than about 15 ppm. More preferred is less than about 10 ppm. Most preferred is less than about 5 ppm.

Detailed description of the drawings

Her skal være en beskrivelse af figurerne.

Examples

Example 1

The hydrophobic cellulose fibres are made hydrophobic by the following process:

5 The cellulose fibre sheet is dipped in a solution of 5-50 % hydrophobic emulsion (e.g. 200 G resin emulsion per litre water = 20%) for about ½-5 minutes. By passing the sheet through a roll, the water is pressed out of the cellulose sheet. Hereafter the sheet is dipped in a 1-30% solution of potassium/sodium sulphate (e.g. 20 G alum per litre water = 2%) for about ½-5 minutes. After pressing out the water of the cellulose sheet by a roll, the process is followed by a drying process in an oven (110 degree C/ 20 minutes).

10

Example 2

15 A filter cartridge (test cartridge 1) utilising spacer medium and filtration medium according to the present disclosure but without the inner zone, mounted with annular end caps bonded totally to the ends of the filter, exhibits a filter life approximately two times greater than a control filter cartridge (control filter cartridge) wrapped with only filtration medium.

20 Visual inspection and dissection of the filter cartridge (test cartridge 1) shows a contaminant loading corresponding to a radial flow from the outermost layer to the central coil covering about 10-15% of the filter. In comparison only the outermost layer of filtration medium displayed contaminant loading in control filter (control filter cartridge), covering about 2-5% of the filter.

25 Example 3

30 A filter cartridge (test cartridge 2) utilising only filtration medium, mounted with annular end caps with two circle packing, this filter exhibits a filter life 1½ times better than a control cartridge (control filter cartridge) having end caps totally bonded to the ends of the filter.

Visual inspection and dissection of the filter cartridge shows a contaminant loading corresponding to a radial flow from the outermost layer to the central coil covering about 25% of the filter.

Example 4

5 A filter cartridge (test cartridge 3) utilising spacer medium and filtration medium according to the present disclosure but without inner zone, mounted with annular end caps with two circle packing, exhibits a filter life 3 times better than a control filter cartridge (control filter cartridge 1).

10 A visual inspection and dissection of the filter cartridge medium showed a contaminant loading corresponding to a radial and longitudinal flow from the outermost layer to the central coil covering about 50% of the filter.

Example 5

15 A filter cartridge (test cartridge 4) utilizing spacer medium and filtration medium according to the present disclosure but without inner zone, mounted with annular end caps with perforated zones and two circle packing, exhibits a filter life 5 times greater than a control filter (control filter cartridge 1).

20 A visual inspection and dissection of the filter cartridge medium showed a contaminant loading corresponding to a radial and longitudinal flow from the outermost layer to the central coil covering about 80% of the filter.

Example 6

25 A filter cartridge (test cartridge 5) utilizing spacer medium and filtration medium according to the present disclosure wrapped without spacer medium in the inner part of the filter cartridge, mounted with annular end caps with perforated zones and two circle packing, exhibits a filter life 5-6 times greater than a control filter

30 A visual inspection and dissection of the filter cartridge medium showed a contaminant loading corresponding to a radial and longitudinal flow from the outermost layer to the central coil covering about 80-90% of the filter.

35 Thus the combination of modified annular end caps, spacer material and inner zone as described for test cartridge 4 provides a synergetic effect that was not to be expected based upon the performances of test cartridge 2.

The examples 2-6 are summarised in the following table:

Filter type	Filtration medium	Spacer medium	Inner zone of filtration medium	Bypass spaces	End cap with perforations	Contaminant loading	Filter capacity
Control filter cartridge	+	-	-	-	-	2-5 %	1
Test filter cartridge 1	+	+	-	-	-	10-15 %	2
Test filter cartridge 2	+	-	-	+	-	25 %	1.5
Test filter cartridge 3	+	+	-	+	-	50 %	3
Test filter cartridge 4	+	+	-	+	+	80 %	5
Test filter cartridge 5	+	+	+	+	+	80-90 %	5-6

Claims

1. A filter for liquid filtration, said filter comprises
 - 5 ° at least two layers of filtration medium, comprising
 - ° at least one inner layer of filtration medium and
 - ° at least one outer layer of filtration medium,
 - ° wherein each layer has at least one edge and a filtering area, and
 - 10 ° wherein a first sealing seals said at least one edge of said at least one inner layer of filtration medium, and said first sealing directs liquid to be filtered through the filtering area of said at least one inner layer of filtration medium having the sealing, and wherein
 - 15 ° the liquid to be filtered enters the filtration material
 - ° through the filtering area of said at least one outer layer of filtration medium and/or
 - ° through said edge of said at least one outer layer of filtration medium and/or
 - 20 ° between two adjacent edges of layers of filtration medium.
2. The filter according to claim 1, wherein said first sealing comprises a sealing prohibiting liquid to enter said at least one edge of said sealed at least one inner layer of filtration medium.
- 25 3. The filter according to claim 2, wherein said sealing encapsulates said edge of said at least one inner layer of filtration medium.
- 30 4. The filter according to claim 3, wherein said first sealing comprises a glue joint prohibiting liquid to enter said at least one edge of said glued at least one inner layer of filtration medium.
- 35 5. The filter according to any of the preceding claims, wherein said filter further comprising at least one layer of spacer medium, wherein said at least one layer of spacer medium has at least one edge and a spacer area, and wherein said at

least one layer of spacer medium is provided between said at least one inner layer of filtration medium and said at least one outer layer of filtration medium with the spacer area of the spacer medium next to the filtration area of the filtration medium.

5

6. The filter according to claim 5, wherein said at least two layers of filtration medium and said at least one layer of spacer medium comprises a plurality of layers of filtration medium and a plurality of layers of spacer medium, and said layers of filtration medium and said layers of spacer medium alternate with at least one layer of filtration medium and at least one layer of spacer medium.

10

7. The filter according to claim 6, wherein said at least one layer of filtration medium alternate with said at least one layer of spacer medium with the repeated alternating structure of a filtration medium 1 and a spacer medium 1.

15

8. The filter according to claim 6, wherein said at least one layer of filtration medium alternate with said at least one layer of spacer medium with the repeated alternating structure of a filtration medium 1, a spacer medium 1, a filtration medium 2 and a spacer medium 2.

20

9. The filter according to claim 6, wherein said at least one layer of filtration medium alternate with said at least one layer of spacer medium with the repeated alternating structure of filtration medium 1, spacer medium 1 and filtration medium 2.

25

10. The filter according to claim 5 to 9, wherein the innermost layer of the filter is at least one layer of said at least one inner layer of filtration medium.

30

11. The filter according to any of the preceding claims, wherein said first sealing seals the edges of at least 2 layers of said at least one inner layer of filtration medium, such as at least 3 layers, e.g. at least 4 layers, such as at least 5 layers, e.g. at least 6 layers, such as at least 7 layers, e.g. at least 8 layers, such as at least 9 layers, e.g. at least 10 layers.

12. The filter according to claim 5 to 11 wherein said first sealing seals the innermost edges of said at least one inner filtration medium and of said at least one inner spacer medium comprising sealing in total the edges of at least 2 layers of said filtration medium and spacer medium, such as at least 3 layers, e.g. at least 4 layers, such as at least 5 layers, e.g. at least 6 layers, such as at least 7 layers, e.g. at least 8 layers, such as at least 9 layers, e.g. at least 10 layers.
13. The filter according to any of the preceding claims, further comprising a second sealing, said second sealing comprises sealing one or more of said edges of layers of filtration medium and/or spacer medium, wherein said first sealing and said second sealing have a mutual distance, and where the edges of filtration medium and/or spacer medium between said first sealing and said second sealing are unsealed.
14. The filter according to claim 13, further comprising a number of additional sealings with distance to said second sealing and each with mutual distance, and wherein said additional sealings each seals one or more of the edges of said layers of filtration medium and/or of the edges of said spacer medium and where the edges of said filtration medium and said spacer medium between each sealing are unsealed.
15. The filter according to claim 14, wherein said number of additional sealings are at least 1, such as at least 2, for instance at least 3, such as at least 4, for instance at least 5.
16. The filter according to any of the preceding claims 13 to 15, wherein said second sealing and/or said additional sealings each comprises sealing said edges of filtration medium and/or spacer medium and wherein said sealing comprises encapsulation one or more of said edges of layers of filtration medium and/or spacer medium or gluing one or more of said edges of layers of filtration medium and/or spacer medium.

17. The filter according to any of the preceding claims, wherein said sealing is selected from the group of hydraulic glue, polymer, rubber packing, metallic packing.
- 5 18. The filter according to any of the preceding claims, wherein said sealing is selected from the group of polyethylene, polypropylene, polyolefins, polyamids,
19. The filter according to any of the preceding claims, wherein said sealing is selected from the group of polyethylene, polypropylene.
- 10 20. The filter according to any of the preceding claims, wherein said sealing comprises an end cap and said end cap provide open spaces comprising bypass spaces between said sealings, where contaminated liquid or filtered liquid can enter said bypass spaces and further enter into said filtration medium and said spacer medium through said edges of said filtration medium and said spacer medium.
- 15 21. The filter according to claim 20, wherein said end cap further comprises perforations in the end cap itself in the area outside of the first sealing, and contaminated liquid can run through said perforations.
- 20 22. The filter according to any of the preceding claims, wherein said filtration medium and said spacer medium have pores and the pores of the spacer medium are larger than the pores of the filtration medium.
- 25 23. The filter according to claim 22, wherein said pores are larger than 0.5 μM .
24. The filter according to claim 22 to 23, wherein said pores of said filtration medium and of said spacer medium constitute a porosity, and said porosity is substantially uniform throughout the filter.
- 30 25. The filter according to claim 22 to 23, wherein said pores of said filtration medium and said spacer medium constitute a porosity, and said porosity varies through the filter.
- 35

26. The filter according to claim 25, wherein said porosity varies through the filter due to graded pore structure.
- 5 27. The filter according to claim 25 to 26, wherein said pores are smaller in the inner layers of said filtration medium and/or said spacer medium.
- 10 28. The filter according to any of the preceding claims, wherein said filtration medium is produced by a product selected from the group of polymers, paper, plant fibres, peat, humus, plastics, wool, cotton, rock wool, cellulose, coal fibre and/or glass wool.
- 15 29. The filter according to any of the preceding claims, wherein said filtration medium is produced by a product selected from the group of polymers, plant fibres, wool, cotton, cellulose, activated coal fibre.
- 20 30. The filter according to any of the preceding claims, wherein said filtration medium is produced of polymers selected from the group of polypropylene, polyethylene, polyester, polycarbonat.
- 25 31. The filter according to any of the preceding claims, wherein said filtration medium can be produced by plant fibre selected from plants of the group of flax, elephant grass, hemp, hop, cotton, coconut palm, trees, straw, hay.
- 30 32. The filter according to any of the preceding claims, wherein said filtration medium is produced by sheets of cellulose fibres and/or polymer fibre.
- 35 33. The filter according to claim 32, wherein said filtration medium is produced by non-woven sheets of cellulose fibres and/or non-woven polymer fibre.
34. The filter according to claim 32, wherein said filtration medium is produced by woven sheets of cellulose fibres and/or polymer fibre.
- 35 35. The filter according to claim 33 to 34, wherein said cellulose fibres are hydrophobic.

- 5 36. The filter according to claim 35, wherein said cellulose fibres are made hydrophobic by treatment with compounds selected from the group of wax, starch, natural resins, synthetic resins, water insoluble polyvinyl alcohol, hydroxyethyl cellulose, ethyl cellulose, carboxymethyl cellulose, polyacrylate resin, alkyd resin, polyester resin.
37. The filter according to claim 35, wherein said cellulose fibres are made hydrophobic by treatment with natural resins.
- 10 38. The filter according to claim 35 to 37, wherein said cellulose fibres are made hydrophobic by a solution of about 1-70% hydrophobic emulsion, such as about 5-50%, e.g. about 10-40 %, such as about 10-30 %, e.g. about 15-25 %, such as about 17-23 %, e.g. about 20%.
- 15 39. The filter according to claim 38, wherein said cellulose fibres are made hydrophobic by contacting with said hydrophobic emulsion for about 0.05-30 minutes, such as for about 0.1-20 minutes, e.g. about 0.2-15 minutes, such as about 0.3-10 minutes, such as about 0.4-7.5 minutes, e.g. about 0.5-5 minutes.
- 20 40. The filter according to claim 38, wherein said cellulose fibres are made hydrophobic by contacting with said hydrophobic emulsion for 0.5-30 minutes
41. The filter according to claim 39 to 40, wherein said hydrophobic cellulose fibres contacted with said hydrophobic emulsion is released for water.
- 25 42. The filter according to claim 41, wherein said hydrophobic cellulose fibres released for water is contacted with a solution of potassium sulphate and sodium sulphate in the concentration of about 0.01-30%, such as about 0.05-20%, e.g. about 0.1-10 %, such as about 0.2-5 %, e.g. about 0.5-4 %, such as about 1-3%, e.g. about 2 %.
- 30 43. The filter according to claim 42, wherein said hydrophobic cellulose fibres contacted with potassium sulphate or aluminium sulphate or potassium aluminium sulphate is released for water and dried.
- 35

- 5 44. The filter according to any of the preceding claims, wherein said spacer medium is produced by a product selected from the group of polymers, paper, plant fibres, plastics, wool, cotton, rock wool, cellulose, coal fibre, metal and/or glass wool.
45. The filter according to any of the preceding claims, wherein said spacer medium can be produced by polymers selected from the group of polypropylene, polyethylene, polyester, polycarbonat.
- 10 46. The filter according to any of the preceding claims, wherein the filter comprises at least one perforated core.
47. The filter according to claim 46, wherein the core is produced by polymer or metal.
- 15 48. The filter according to any of the preceding claims 45 to 46, wherein said core comprises apertures.
49. The filter according to claim 48, wherein said apertures is substantially round or substantially quadrangular.
- 20 50. The filter according to claim 48 to 49, wherein said apertures have a dimension of about $0.25 \mu\text{M}^2$, such as about 0.5 mM^2 , e.g. about 1 mM^2 , such as about 2 mM^2 , e.g. about 3 mM^2 , such as about 4 mM^2 , e.g. about 5 mM^2 , such as about 6 mM^2 , e.g. about 7 mM^2 , such as about 8 mM^2 , e.g. about 9 mM^2 , such as about 10 mM^2 , e.g. about 11 mM^2 , such as about 12 mM^2 , e.g. about 13 mM^2 , such as about 14 mM^2 , e.g. about 15 mM^2 , such as about 16 mM^2 , e.g. about 17 mM^2 , such as about 18 mM^2 , e.g. about 19 mM^2 , such as about 20 mM^2 , e.g. about 25 mM^2 , such as about 30 mM^2 , e.g. about 35 mM^2 , such as about 40 mM^2 , such as about 45 mM^2 , e.g. about 50 mM^2 , such as about 55 mM^2 , e.g. about 60 mM^2 , such as about 70 mM^2 , such as about 80 mM^2 , e.g. about 90 mM^2 , such as about 100 mM^2 , e.g. about 120 mM^2 , such as about 140 mM^2 , e.g. about 160 mM^2 , such as about 180 mM^2 , e.g. about 200 mM^2 .
- 25
- 30

51. The filter according to claim 48 to 50, wherein said apertures is evenly distributed throughout said core.
52. The filter according to claim 48 to 51, wherein said apertures comprises about 5-95 % of the surface area of said core, such as 5-10%, e.g. 10-15 %, such as 10-20%, e.g. 20-30 %, such as 30-40%, e.g. 40-50 %, such as 50-60%, e.g. 60-70 %, such as 70-80%, e.g. 80-95%.
53. The filter according to claim 46 to 52, wherein said core is stable to keep shape under function of the filter.
54. The filter according to any of the preceding claims 46 to 53, wherein said core drains filtered liquid from said filter, and where said contaminated liquid enters the filter from the outside or through perforations of said end cap or into filtration medium or spacer medium from said bypass spaces and eventually enters said core.
55. The filter according to any of the preceding claims 46 to 54, wherein the at least one filtration medium and the at least one spacer medium are overlying one another and spirally surrounding the central core.
56. The filter according to claim 55, wherein said core comprises one perforated central core.
57. The filter according to claim 55 to 56, wherein said at least one filtration medium and said at least one spacer medium is one layer of filtration medium and one layer of spacer medium.
58. The filter according to any of the preceding claims 55 to 57, wherein said at least one filtration medium form an inner zone adjacent to said core, comprising a zone without said spacer medium.
59. The filter according claim 58, wherein said inner zone comprises at least 1 round of said filtration medium.

- 5 60. The filter according to any of the preceding claims 58 to 59, wherein said inner zone comprises at least 2 rounds of said filtration medium, such as at least 3 rounds, e.g. at least 4 rounds, such as at least 5 rounds, e.g. at least 6 rounds, such as at least 7 rounds, e.g. at least 8 rounds, such as at least 9 rounds, e.g. at least 10 rounds, such as at least 11 rounds, e.g. at least 12 rounds, such as at least 13 rounds, e.g. at least 14 rounds, such as at least 15 rounds, e.g. at least 16 rounds, such as at least 17 rounds, e.g. at least 18 rounds, such as at least 19 rounds, e.g. at least 20 rounds.
- 10 61. The filter according to any of the preceding claims 58 to 60, wherein said inner zone comprises about 0.05-15 cm, such as about 0.06-10 cm, e.g. about 0.07-5 cm, such as about 0.08-10 cm, e.g. about 0.09-5 cm, such as about 0.1-4 cm, e.g. about 0.1-3 cm, such as about 1-2 cm, e.g. about 2-3 cm, such as about 3-4 cm, e.g. about 4-5 cm, such as about 5-6 cm, e.g. about 6-8 cm, such as about 8-10 cm, e.g. about 10-12 cm, such as about 12-15 cm.
- 15 62. The filter according to any of the preceding claims 58 to 61, wherein said end cap is closed in the area of said inner zone, and perforated in the area outside of said inner zone.
- 20 63. The filter according to any of the preceding claims 58 to 62, wherein said end cap is closed in the area of said inner zone and is further closed in part of the area comprising filtration medium and spacer medium, and no bypass spaces is located beneath said areas where the end cap is closed.
- 25 64. The filter according to any of the preceding claims, wherein contaminated liquid is water contaminated with one or more compounds and/or or particles.
- 30 65. The filter according to claim 64, wherein said one or more compounds and/or particles are selected from the group of oil, sand, soil particles, bacteria, yeast, organic flocculation, dust, plant parts, ochre, humus, plant nutrient.
66. The filter according to claim 64, wherein said one or more compounds and/or or particles are selected from the group of organic liquids such as oil or

hydrocarbons e.g. synthetic oils and fuels, coolants, paints, polymers, alcohols, solvents, aromatics, heavy metals, sewage, insecticides, herbicides.

- 5 67. A filter cartridge comprising a filter according to any of the preceding claims, wherein said filter cartridge is used in a filter house.
68. A filter house according to any of the preceding claims, wherein at least one filter cartridge according to claim 67 is used.
- 10 69. The filter house according to claim 68, wherein said at least one filter cartridge is at least 2 filter cartridges, such as at least 3 filter cartridges, e.g. at least 4 filter cartridges, such as at least 5 filter cartridges, e.g. at least 6 filter cartridges, such as at least 7 filter cartridges, e.g. at least 8 filter cartridges.
- 15 70. The filter house according to any of the preceding claims 68 to 69, wherein said at least one filter cartridges are stacked and where said at least one core from each filter cartridges are connected to perform a draining tube to drain off said filtered liquid.
- 20 71. The filter house according to any of the preceding claims 68 to 70, wherein said filter house comprises a container, which has at least one opening means and through which at least one opening means said filter cartridges can be changed.
- 25 72. The filter house according to any of the preceding claims 68 to 71, wherein said filter house comprises at least one entry for contaminated liquid and at least one exit for said draining tube.
- 30 73. The filter house according to any of the preceding claims 68 to 72, wherein said filter house with at least one of said filter cartridge mounted, is partly or fully filled with contaminated liquid.
74. The filter house according to any of the preceding claims 68 to 73, wherein said filter house is exposed to pressure.

75. The filter house according to claim 74, wherein said pressure is about 0.1-6 Bar, such as about 0.5-5 Bar, e.g. about 1-4 Bar, such as about 2-3,5 Bar, e.g. about 1 Bar, such as about 1.5 Bar, e.g. about 2 Bar, such as about 2.5 Bar, e.g. about 3 Bar, such as about 3.5 Bar, e.g. about 4 Bar, such as about 4.5 Bar, e.g. about 5 Bar, such as about 5.5 Bar, e.g. about 6 Bar.
76. The filter house according to any of the preceding claims 68 to 75, wherein said filter cartridges are connected by said draining tube and where no contaminated liquid can pass into said draining tube.
77. The filter house according to any of the preceding claims 68 to 76, wherein said draining tube is said perforated core inside said filter cartridges and said perforated cores are connected by packings, and said filter cartridge or filter cartridges situated at the top of each stack of filter cartridges are closed at the end of the core not connected to another filter cartridge.
78. The filter house according to any of the preceding claims 68 to 77, wherein said filter house is barrel shaped and has a radius of about 500 mm.
79. The filter house according to any of the preceding claims 68 to 78, wherein said filter house has a height of at least about 300 mM, such as at least about 400 mM, e.g. at least about 500 mM, such as at least about 600 mM, e.g. at least about 700 mM, such as at least about 800 mM, e.g. at least about 900 mM, such as at least about 1000 mM, e.g. at least about 1200 mM, such as at least about 1300 mM, e.g. at least about 1400 mM, such as at least about 1500 mM, e.g. at least about 1600 mM, such as at least about 1700 mM, e.g. at least about 1800 mM, such as at least about 1900 mM, e.g. at least about 2000 mM, such as at least about 2100 mM, e.g. at least about 2200 mM.
80. The filter house according to any of the preceding claims 68 to 79, wherein the contaminated liquid when entering the container is situated within a sump, and said contaminated liquid when situated in said sump is in motion.
81. The filter house according to claims 80, wherein said motion of said contaminated liquid is performed by stirring, boiling and/or gas permeation.

82. The filter house according to claims 68 to 81, wherein said filter house comprises pressure regulation means.

5 83. A filtration system comprising at least two filter houses according to any of the preceding claims 68 to 82, wherein the at least two filter houses are connected in the way that contaminated liquid is filtered successively in the at least two filter houses, and where the contaminated liquid enters in a filter house no. 1 and the draining tube of filter house no. 1 is connected to the entry of filter house
10 no. 2 and so forth.

84. A filtration system according to claim 83, wherein said at least two filter houses graduates the filtration due to larger pores of filtration medium and spacer medium within filter house no. 1 than within succeeding filter houses and where
15 the pores of said filtration medium and spacer medium are graded in said succeeding filter houses.

85. A filtration system according to claim 83 to 84, wherein contaminated liquid can be conveyed from the outside to any of said filter houses.
20

86. Production of a filter, filter cartridge and/or filtration system according to any of the preceding claims.

87. Use of a filter, filter cartridge and/or filtration system according to any of the preceding claims.
25

88. The use according to claim 87 for filtering contaminated liquid according to claim 64 to 66.

30 89. The use according to claim 87 to 88 for filtering contaminated liquid within areas selected from the group of factories, sewage works, paint factories, paper factories, ships.

90. The use according to claim 87 to 88 for filtering water contaminated with oil at
35 ships.

91. The use according to claim 90, wherein said ship is selected from the group of oil tanker, transport ship, ferry, fishing vessel.

5 92. The use according to claim 90 to 91, wherein said ship is registered to above at
least 100 register ton, such as at least 150 register ton, e.g. at least 200 register
ton, such as at least 250 register ton, e.g. at least 300 register ton, such as at
least 350 register ton, e.g. at least 400 register ton, such as at least 450 register
ton, e.g. at least 500 register ton, such as at least 550 register ton, e.g. at least
10 600 register ton, such as at least 650 register ton, e.g. at least 700 register ton.

93. The use according to claim 87 to 91, wherein the filtered water is discharged to areas selected from the group of: land, river, sea, ocean, harbour.

15 94. The use according to claim 87 to 91, wherein the filtered water is discharged to the sea or ocean.

95. The use according to claim 87 to 94 wherein the amount of oil is less than about
25 ppm in the filtered water, such as less than about 20 ppm, e.g. less than 15
20 ppm, such as less than about 14 ppm, e.g. less than about 13 ppm, such as less
than about 12 ppm, e.g. less than about 11 ppm, such as less than about 10
ppm, e.g. less than about 9 ppm, such as less than about 8 ppm, e.g. less than
about 7 ppm, such as less than about 6 ppm, e.g. less than about 5 ppm, such
as less than about 4 ppm, e.g. less than about 3 ppm, such as less than about 2
25 ppm, e.g. less than about 1 ppm.

02 JULI 2003

Modtaget

1/10

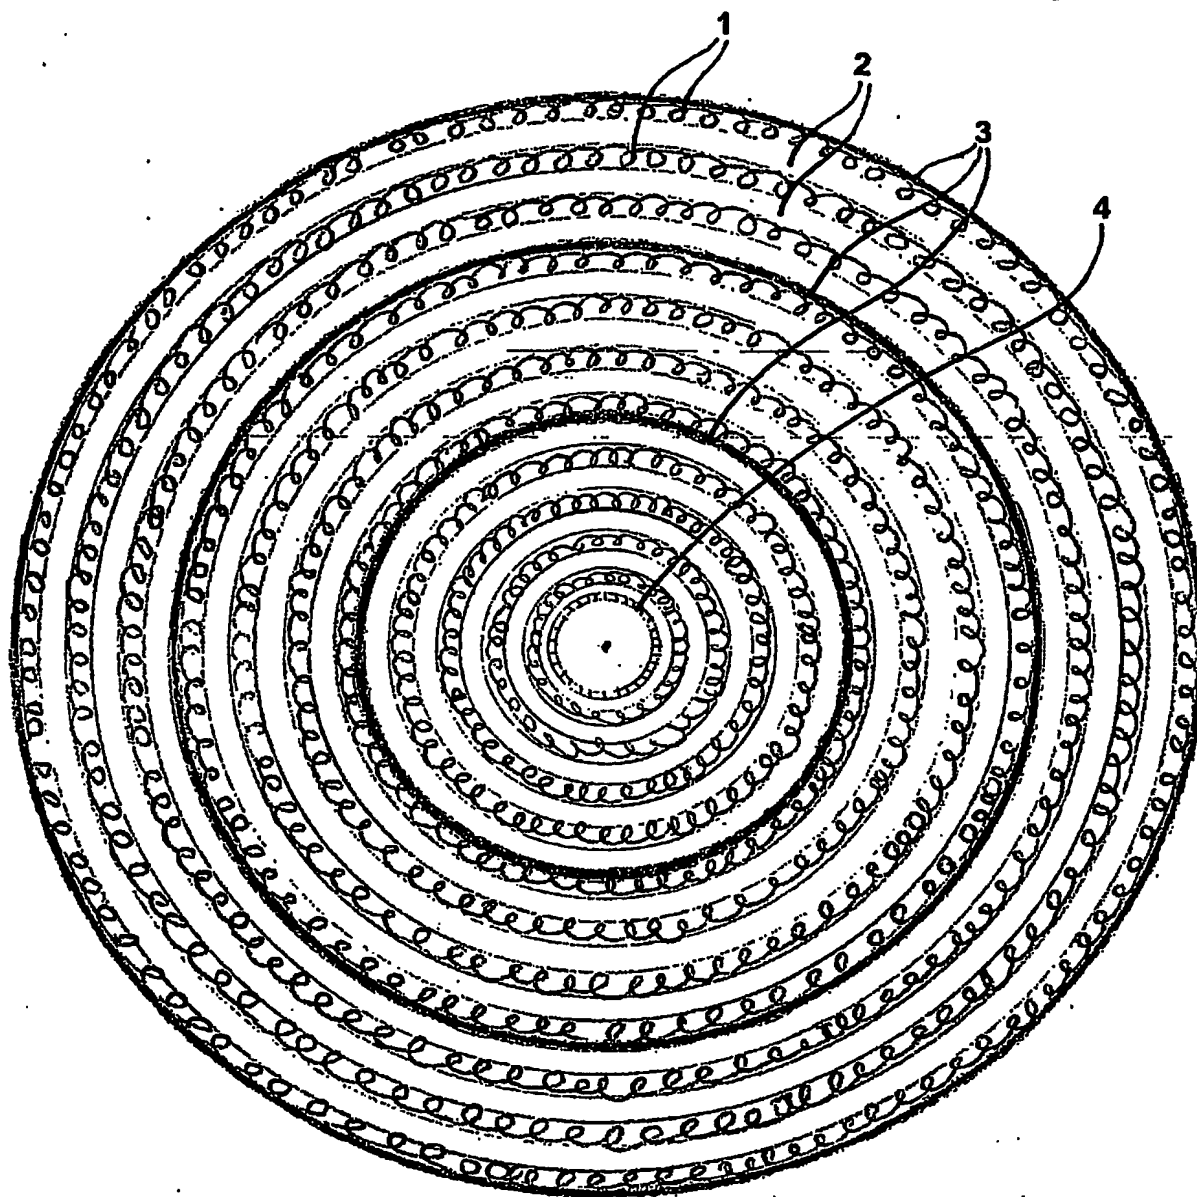


Fig. 1

2/10

Patent- og
Varemærkestyrelsen

02 JULI 2003

Modtaget

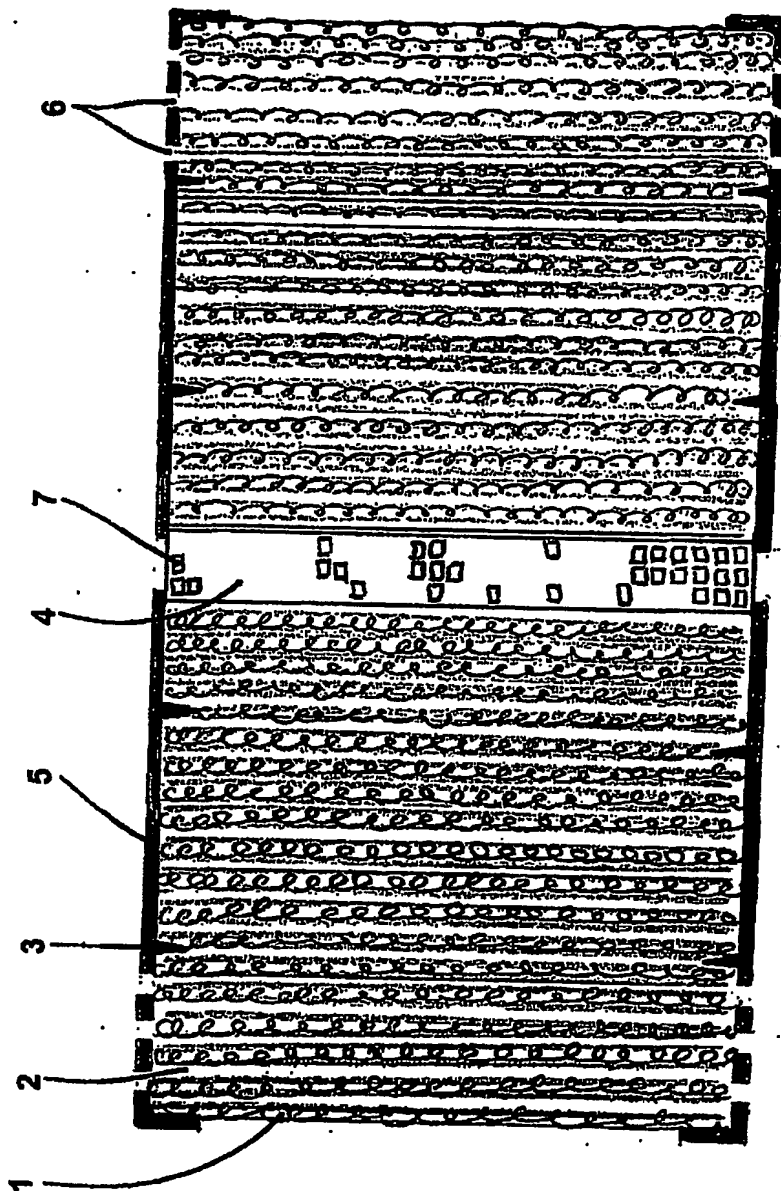


Fig. 2

02 JULI 2003

Modtaget

3/10

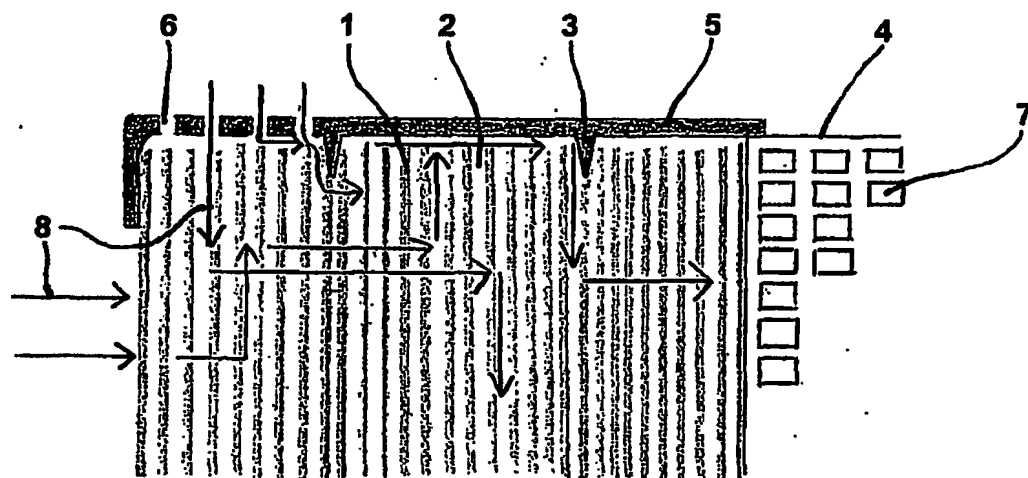


Fig. 3

4/10

Patent- og
Varemærkestyrelsen

02 JULI 2033

Modtaget

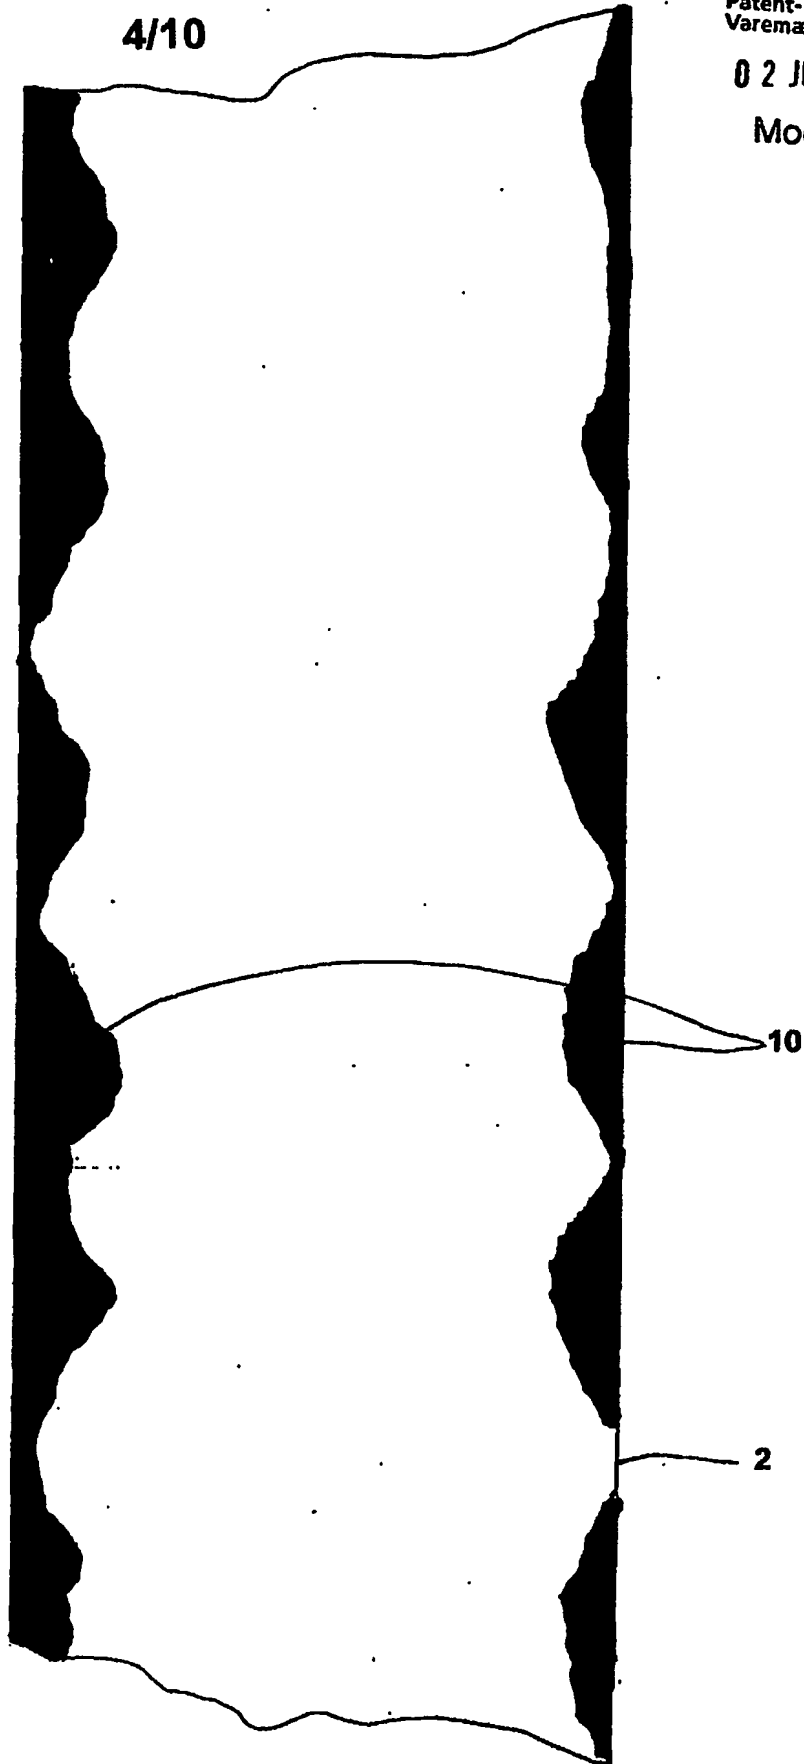


Fig. 4

02 JULI 2003

Modtaget

5/10

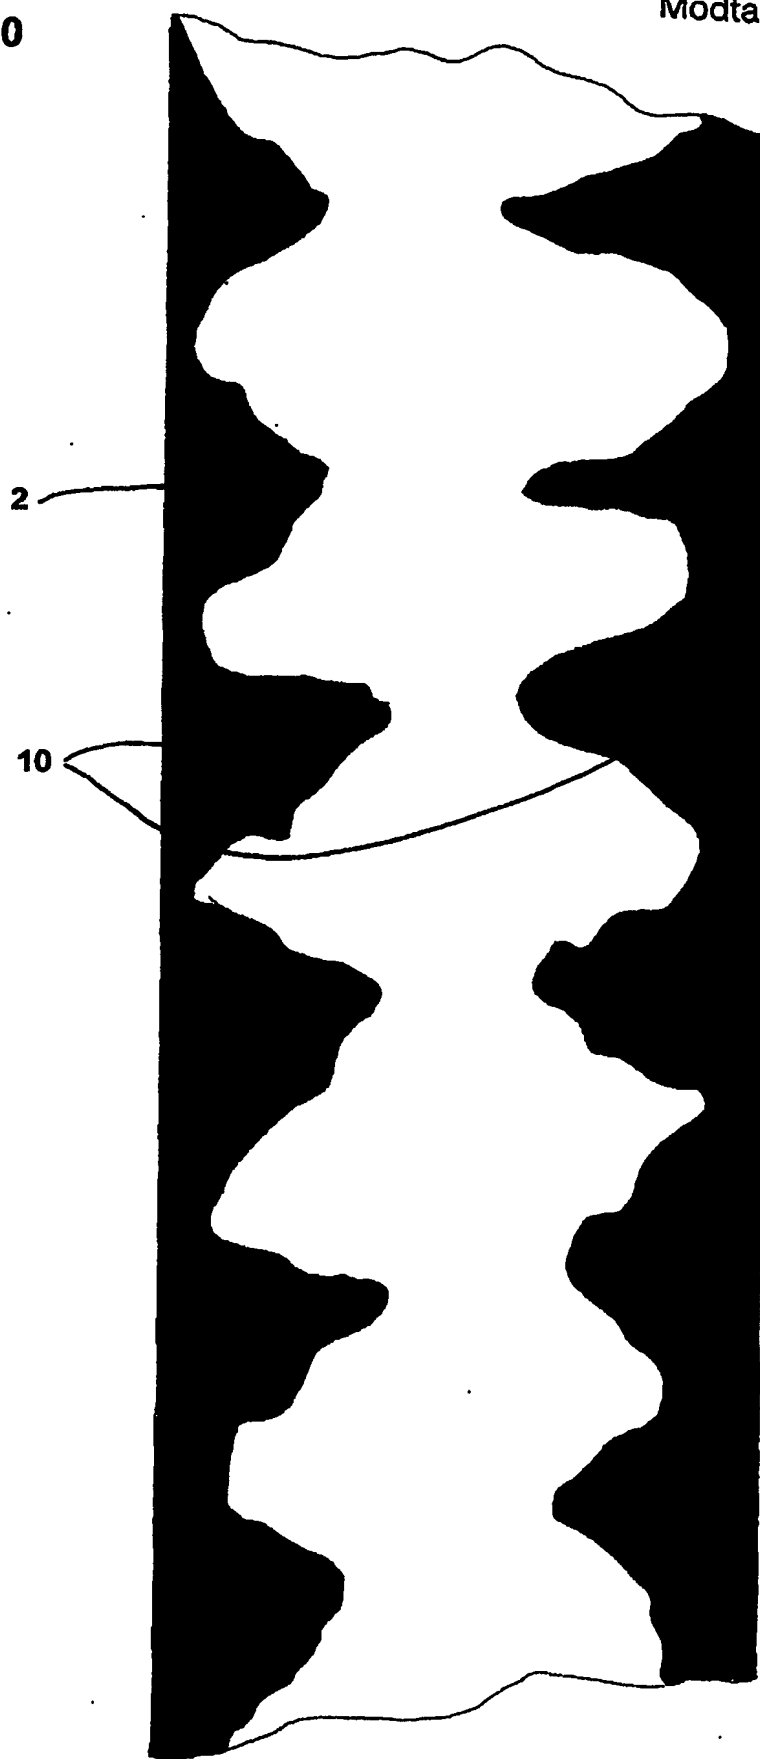


Fig. 5

02 JUL 2003

Modtaget

6/10

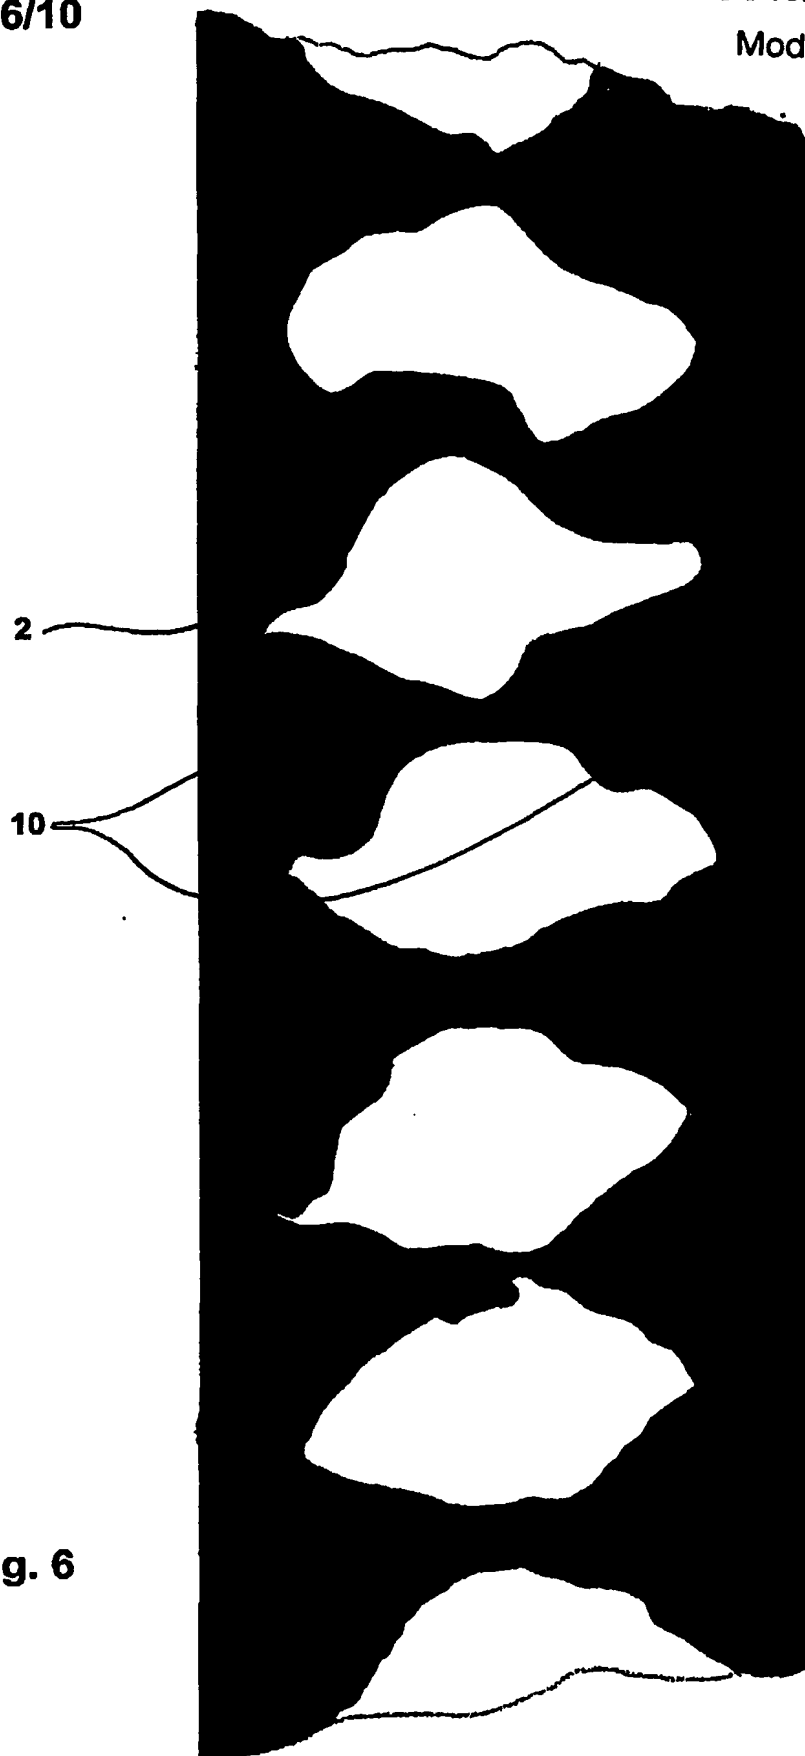


Fig. 6

02 JULI 2003

Modtaget

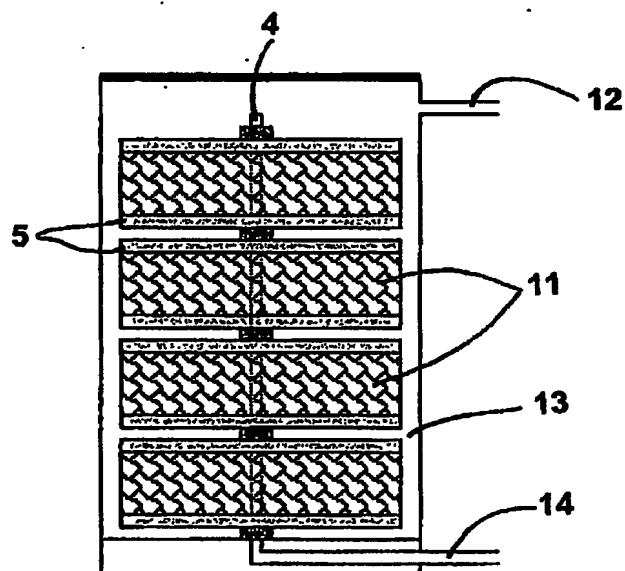


Fig. 7

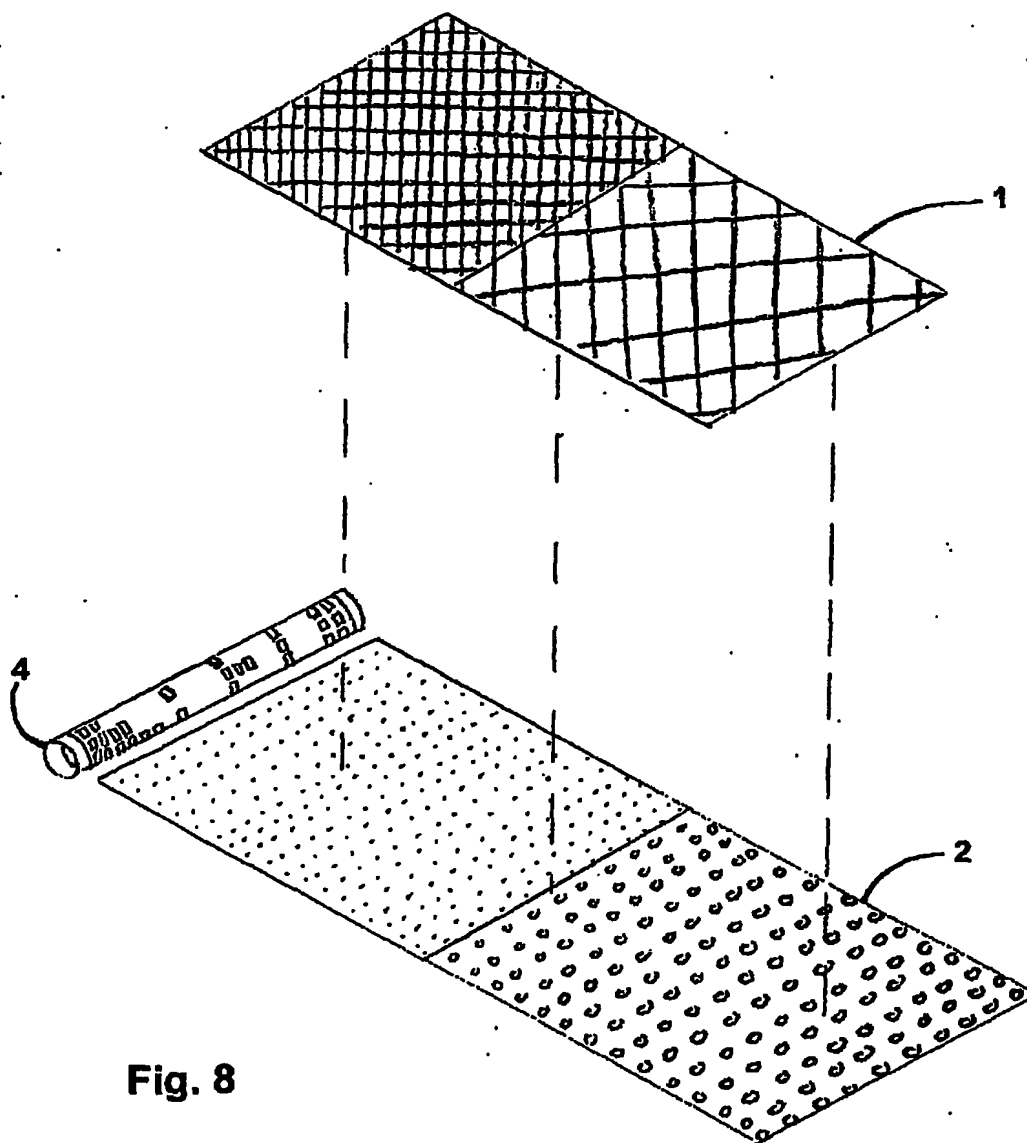


Fig. 8

9/10

Patent- og
Varemærkestyrelsen

02 JULI 2003

Modtaget


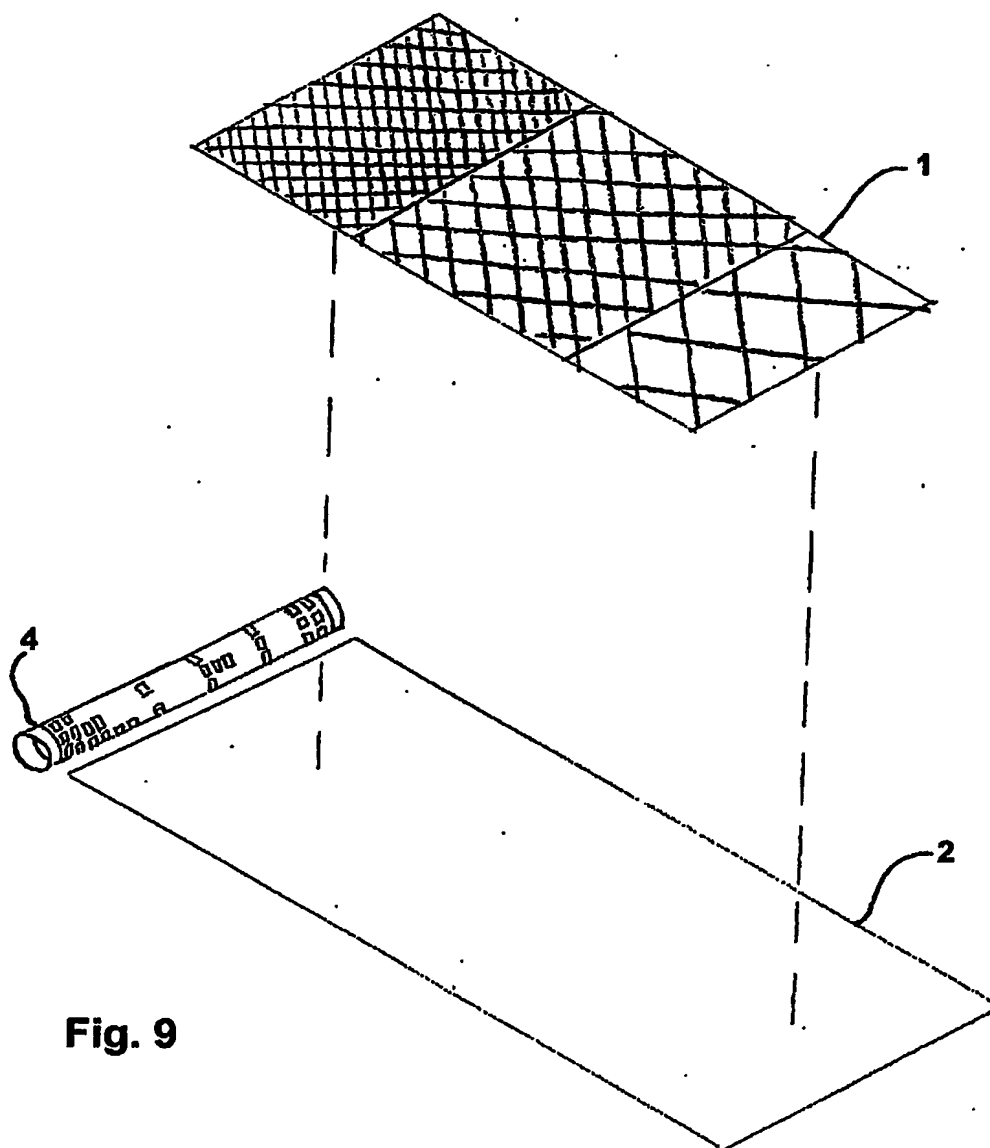


Fig. 9

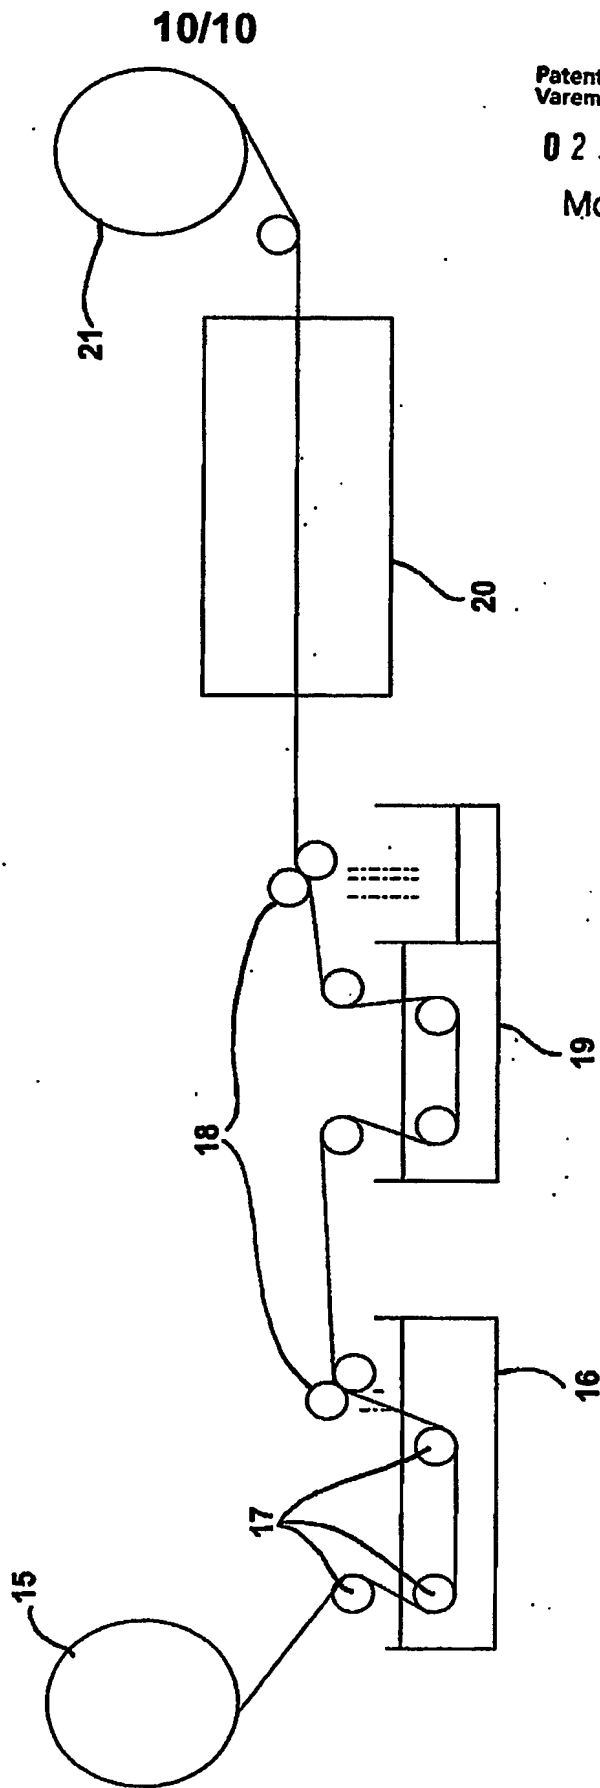

Patent- og
Varemærkestyrelsen
02 JULI 2003
Modtaget

Fig. 10

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.